

DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
JLR	6	C 261-3-47, etc		VAR
GRAPHICS				
JLR	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK CYE	TEXAS	DALLAS	DALLAS	1
CHECK	CONTROL	SECTION	JOB	
TBP	0261	03	047, etc.	

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, MARCH 1, 1993, AND THE CONTRACT PROVISIONS LISTED AND DATED AS FOLLOWS SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS SPECIAL LABOR PROVISIONS FOR STATE PROJECTS (000-2381).


For DIRECTOR, DESIGN DIVISION

INDEX OF SHEETS

SHEET	DESCRIPTION
<b><u>I. GENERAL</u></b>	
1	TITLE SHEET
2	INDEX OF SHEETS
3	TYPICAL SECTION
4 - 4A	GENERAL NOTES
5	ESTIMATE AND QUANTITY SHEET
6	SUMMARY SHEETS


<b><u>II. TRAFFIC CONTROL PLAN</u></b>	
7	<b>OMIT</b>
8	TCP (1-4) -98
9-10	TCP (3-1) - (3-2) -98
11	TCP (7-1) -98
12-23	BC (1-12) -03
24	WZ (TD) -03
25	WZ (UL) -03
26	<b>OMIT</b>
27	<b>OMIT</b>
28	WZ (BRK-2) -03


<b><u>III. ENVIRONMENTAL ISSUES</u></b>	
29	STORM WATER POLLUTION PREVENTION PLAN (SW3P)
30	EC (1) -93



THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN  
SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING  
APPLICABLE TO THIS PROJECT.

*Jahor Roy*, P.E. 4/9/03  
Date


 <b>Texas Department of Transportation</b> © 2003				
<b>INDEX OF SHEETS</b>				
DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
JLR	6	C 261-3-47, etc.		VAR
GRAPHICS	JLR	STATE	DISTRICT	COUNTY
CHECK	TBP	TEXAS	DALLAS	DALLAS
CHECK	TBP	CONTROL	SECTION	JOB
		0261	03	047, etc.
				2

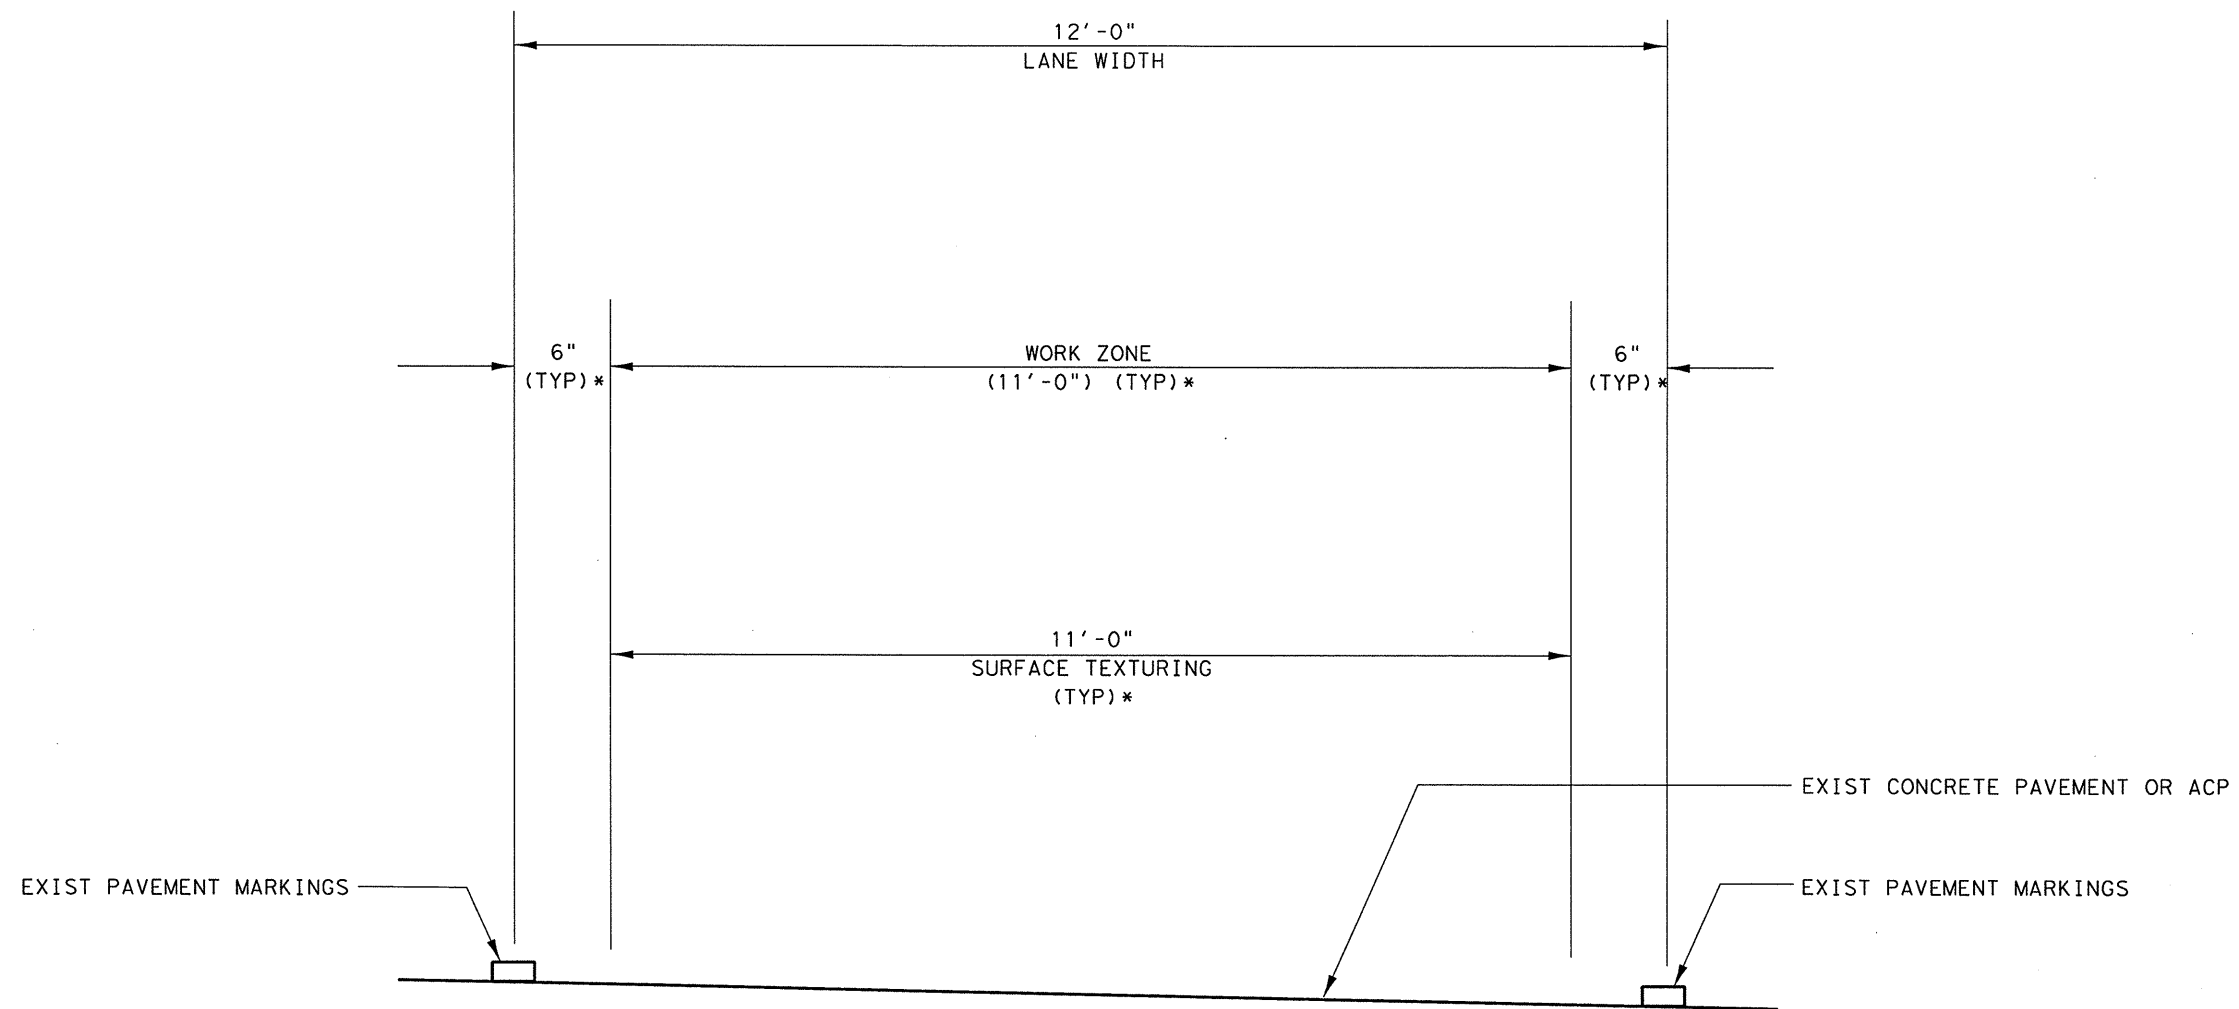

## TYPICAL ROADWAY TEXTURING SECTION

NOTES: (1) NUMBER & WIDTH OF TRAFFIC LANES VARY BY LOCATION, AND  
(2) ALL LANES AT EACH LOCATION ARE INCLUDED.

\* WIDTH MAY BE INCREASED OR DECREASED ACCORDING TO THE ENGINEER.

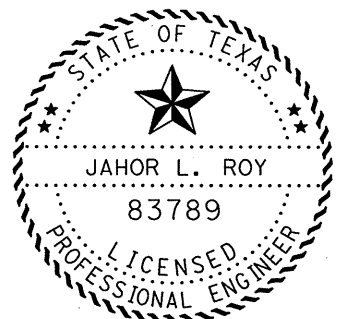

*Jahor Roy* 4/9/03

Texas Department of Transportation  
© 2003

## TYPICAL SECTION

SCALE: NOT TO SCALE

DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
JLR	6	C 261-3-47, etc.		VAR
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
JLR	TEXAS	DALLAS	DALLAS	3
CHECK TBP	CONTROL	SECTION	JOB	
CHECK TBP	0261	03	047, etc.	

PROJECT NUMBER: C 261-3-47, ETC.

SHEET 4

COUNTY: DALLAS

Control: 0261-03-047,ETC.

HIGHWAY: US 67, ETC.

**GENERAL:**

The construction, operation, and maintenance of this proposed project will be consistent with the State Implementation Plan as prepared by the Texas Commission on Environmental Quality.

Upon request of the Engineer, the Contractor shall furnish to the Engineer a typed narrative report, signed and dated by the Contractor, outlining the manner of prosecution of work that he intends to follow in the subsequent thirty (30) day period.

If at any time during the construction of this project, the Contractor falls more than 30 days behind his schedule submitted under provisions of Article 8.2, he shall furnish the Engineer with an updated realistic construction schedule.

Existing roads within the limits of the project, which are to remain temporarily for the purpose of handling traffic through the project, will be maintained by the Contractor in a manner that is acceptable to the Engineer. This work will not be paid for directly, but shall be considered subsidiary to the various bid items.

Upon completion of the work and before acceptance is made, the Contractor shall clear and remove from the site all surplus and discarded materials and debris of every kind and leave the entire project in a smooth, neat appearing, and clean condition.

OSHA requirements shall be followed at all times.

The Contractor will be responsible for damages to utilities, if the damage is caused by negligence or a failure to have locates performed.

Questions prior to letting may be submitted by e-mail or fax and will be answered by e-mail or fax:

E-MAIL: jhudsp1@dot.state.tx.us

FAX: (972) 235-8667

A file containing these questions and answers will be available for review at the Area Engineer's Office:

12000 Greenville Ave.

Southwest Area Office

Dallas, Texas 75243

The Contractor will be required to place trailer mounted information signs, or the equivalent, informing the traveling public of the intent to close ramps on planned dates. This sign will have

PROJECT NUMBER: C 261-3-47, ETC.

SHEET 4

COUNTY: DALLAS

Control: 0261-03-047,ETC.

HIGHWAY: US 67, ETC.

to be in place a minimum of seventy-two (72) hours prior to closures. No two (2) consecutive entrance or exit ramps may be closed at the same time. The trailer mounted information sign or equivalent will be subsidiary to Item 502.

The Contractor shall take extreme care on bridge structures when operating near bridge deck joints. The Contractor shall be required to take all necessary precautions to locate and preserve these joints intact and undisturbed. The Contractor will be responsible for damages to said joints if the damage is caused by negligence or a failure to have locates performed.

The Contractor shall not park any construction equipment overnight within 30 feet of the pavement, without proper safeguard in place.

The Contractor will be required to provide for the safe passage of traffic on, and/or across highways, roads, or streets where such facilities are involved in the construction of this project. The number of traffic lanes may be reduced during nighttime hours, when approved by the Engineer, but such lanes shall be restored and remain unobstructed for travel during peak hours.

Any destruction to existing drainage due to the Contractor's operations will be repaired by the Contractor as required by the Engineer at the Contractor entire expense.

Work shall be performed at night Sunday to Thursday, from 9:30 PM to 5:30 AM.

The 42-inch cones shall be used for nighttime lane closure.

**ITEM 502: BARRICADES, SIGNS AND TRAFFIC HANDLING**

The Traffic Control Plan shall consist of nighttime lane closures in accordance to the TCP Standards and the *2003 Texas Manual on Uniform Traffic Control Devices*. The TCP will be considered short term – short duration for this project. Use temporary portable signage while work is in progress. Remove all signage when work is not in progress.

For this project, reflective surfaces on channelizing devices, such as cones, vertical panels, drums, and barricades shall be the high specific intensity type, flat surface, reflective sheeting and shall conform with Departmental Materials Specification, *Flat Surface Reflective Sheeting*, DMS-8300, Type C. Reflective surfaces on signs shall also conform to Departmental Materials Specification DMS-8300, Type C.

The Contractor shall plan his work sequence in a manner that will cause the minimum interference with traffic during construction operations. Before beginning work on this project, the Contractor shall submit, for approval by the Engineer, a plan of construction operations outlining in detail a sequence of work to be followed, setting out the method of handling traffic along, across, and adjacent to the work.

PROJECT NUMBER: C 261-3-47, ETC.

SHEET 4A

COUNTY: DALLAS

Control: 0261-03-047, ETC.

HIGHWAY: US 67, ETC.

Barricades and signs shall be placed in such a manner as not to interfere with the sight distance of drivers entering the highway from driveways or side streets. To facilitate shifting, barricades and signs used in lane closures or traffic staging may be erected and mounted on portable supports. The designs of these supports are subject to the approval of the Engineer.

A Type C Flashing Arrow panel shall be used in connection with the lane closure signing. The Contractor shall be responsible for furnishing, maintaining, and operating these devices in a manner acceptable to the Engineer, at his entire expense.

During all stages of construction, extreme care shall be taken to prevent debris from falling onto the traveled lanes of roadways under bridges.

Where the Contractor desires to move any equipment, not licensed for operation on public highways, on or across any pavement, he shall protect the pavement from all damage using a method acceptable to the Engineer.

The Contractor shall provide and maintain flaggers at such points and for such periods of time as may be required to provide for the safety and convenience of the traveling public and Contractor personnel, as shown in the plans or as directed by the Engineer.

Yellow flashing warning lights shall be provided for construction warning (CW) signs to remain in place during nighttime hours. Lights will not be required on signs outside barricaded areas, unless specifically indicated on Barricade and Construction (BC) Standards.

A minimum of two Changeable Message Signs (CMS) will be required for this project. The Contractor shall provide and maintain the CMS. This will not be paid for directly, but will be considered subsidiary to this Item.

During construction for closure of a ramp, mainlane, or shoulder, the Contractor shall provide a uniformed police officer with a patrol car. The uniformed police officer and patrol car will not be paid for directly, but shall be considered subsidiary to various bid items.

The Contractor shall keep traveled surfaced used in his hauling operation clear and free of dirt or other material.

Shadow vehicles will be required for this project; see Traffic Control Plan sheet TCP (3-1)-98. This shall be subsidiary to Item 502.

A Distance Measuring Instrument (DMI) of a make approved by the Engineer will be furnished and installed in a State vehicle by the Contractor. The DMI will remain the property of the State upon completion of the contract. This DMI will be subsidiary to Item 502.

The Contractor shall provide proposed lane closure information to the Engineer or his designated representative by 1:00 P.M. on the day prior to the proposed closures for proper entry into the Department's traffic information database. Information for Monday closures or closures

PROJECT NUMBER: C 261-3-47, ETC.

SHEET 4A

COUNTY: DALLAS

Control: 0261-03-047, ETC.

HIGHWAY: US 67, ETC.

following a state holiday must be furnished on the last office workday prior to the closures. The Contractor will not be allowed to close lanes for which the above reporting requirements have not been met.

**ITEM 3342: PAVEMENT TEXTURING**

Testing shall be performed using outflow meter method. Before and after texturing, the testing will be performed by the State forces. The Contractor shall supply two outflow meters for comparative testing. One meter will remain the property of TxDOT upon completion of the project.

The surface material removed shall become the property of the Contractor to be disposed of by him at an approved site outside of TxDOT ROW.

It is the intent of this project to texturing roadway in such a way as to not require re-striping. The Contractor will take care that existing striping is not damaged during his operations. In the event of damage, it will be repaired or replaced as directed by the Engineer at the Contractor's sole expense according to Texas Department of Transportation Standards and Specifications.

The minimum average macrotexture shall be 0.045 inches as determined by Test Method Tex-436-A.

**ITEM 5249: TEMPORARY SEDIMENT CONTROL FENCE**

During the course of this project, the Contractor will be required to use "Temporary Sediment Control Silt Fence" as directed by the Engineer.

This work shall be paid for under bid item 5249.

ESTIMATE SUMMARY


[illegible]

# ESTIMATE & QUANTITY SHEET


STATE DIST. NO.	COUNTY	PROJECT NO.	SHEET NO.
18	DALLAS	C 261-3-47, ETC.	5

PROJECT SUMMARY

CSJ	HWY	LIMITS	TEXTURING PORT CEMENT CONC PAVEMENT (SY) (3342-501)	TEXTURING ASPHSLTIC CONCRETE PAVEMENT (SY) (3342-502)
0261-03-047	SB US 67	FROM: IH 35E	63,600.00	-
	NB US 67	TO: IH 20	63,600.00	-
CSJ (0261-03-047) TOTALS			127,200.00	-
0442-02-134	SB IH 35E	FROM: CLARENDON DR	143,200.00	39,040.00
	NB IH 35E	TO: IH 20	143,200.00	39,040.00
CSJ (0442-02-134) TOTALS			286,400.00	78,080.00
2374-04-057	EB IH 20	FROM: IH 35E	306,170.00	67,165.00
	WB IH 20	TO: TARRANT COUNTY LINE	306,170.00	67,165.00
CSJ (2374-04-057) TOTALS			612,340.00	134,330.00
PROJECT TOTALS			1,025,940.00	212,410.00





Jahor Roy 4/9/13

Texas Department of Transportation  
© 2003

PROJECT SUMMARY

DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
JLR	6	C 261-3-47, etc.		VAR
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
JLR	TEXAS	DALLAS	DALLAS	6
CHECK	CONTROL	SECTION	JOB	
TBP	0261	03	047, etc.	

LEVELS DISPLAYED												DATE:			
1	2	3	4	5	6	7	8	9	10	11	12	3	4	5	6
12	13	14	15	16	17	18	19	20	21	22	23	ACC:			
24	25	26	27	28	29	30	31	32	33	34	35	FILE:			
36	37	38	39	40	41	42	43	44	45	46	47				
48	49	50	51	52	53	54	55	56	57	58	59				
60	61	62	63	64	65	66	67	68	69	70	71				
72	73	74	75	76	77	78	79	80	81	82	83				
84	85	86	87	88	89	90	91	92	93	94	95				
96	97	98	99	100	101	102	103	104	105	106	107				
108	109	110	111	112	113	114	115	116	117	118	119				
120	121	122	123	124	125	126	127	128	129	130	131				
132	133	134	135	136	137	138	139	140	141	142	143				
144	145	146	147	148	149	150	151	152	153	154	155				
156	157	158	159	160	161	162	163	164	165	166	167				
168	169	170	171	172	173	174	175	176	177	178	179				
180	181	182	183	184	185	186	187	188	189	190	191				
192	193	194	195	196	197	198	199	200	201	202	203				
204	205	206	207	208	209	210	211	212	213	214	215				
216	217	218	219	220	221	222	223	224	225	226	227				
228	229	230	231	232	233	234	235	236	237	238	239				
240	241	242	243	244	245	246	247	248	249	250	251				
252	253	254	255	256	257	258	259	260	261	262	263				
264	265	266	267	268	269	270	271	272	273	274	275				
276	277	278	279	280	281	282	283	284	285	286	287				
288	289	290	291	292	293	294	295	296	297	298	299				
300	301	302	303	304	305	306	307	308	309	310	311				
312	313	314	315	316	317	318	319	320	321	322	323				
324	325	326	327	328	329	330	331	332	333	334	335				
336	337	338	339	340	341	342	343	344	345	346	347				
348	349	350	351	352	353	354	355	356	357	358	359				
360	361	362	363	364	365	366	367	368	369	370	371				
372	373	374	375	376	377	378	379	380	381	382	383				
384	385	386	387	388	389	390	391	392	393	394	395				
396	397	398	399	400	401	402	403	404	405	406	407				
408	409	410	411												



- The requirement for shadow vehicles will be listed in the project GENERAL NOTES, Item 502, Barricades, Signs and Traffic Handling.




154



DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DN:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CK:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DW:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CK:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

DATE: 12/1/98  
ACC: 17181920212223242526272829303132  
FILE: 030405060708091011121314151617181920212223242526272829303132

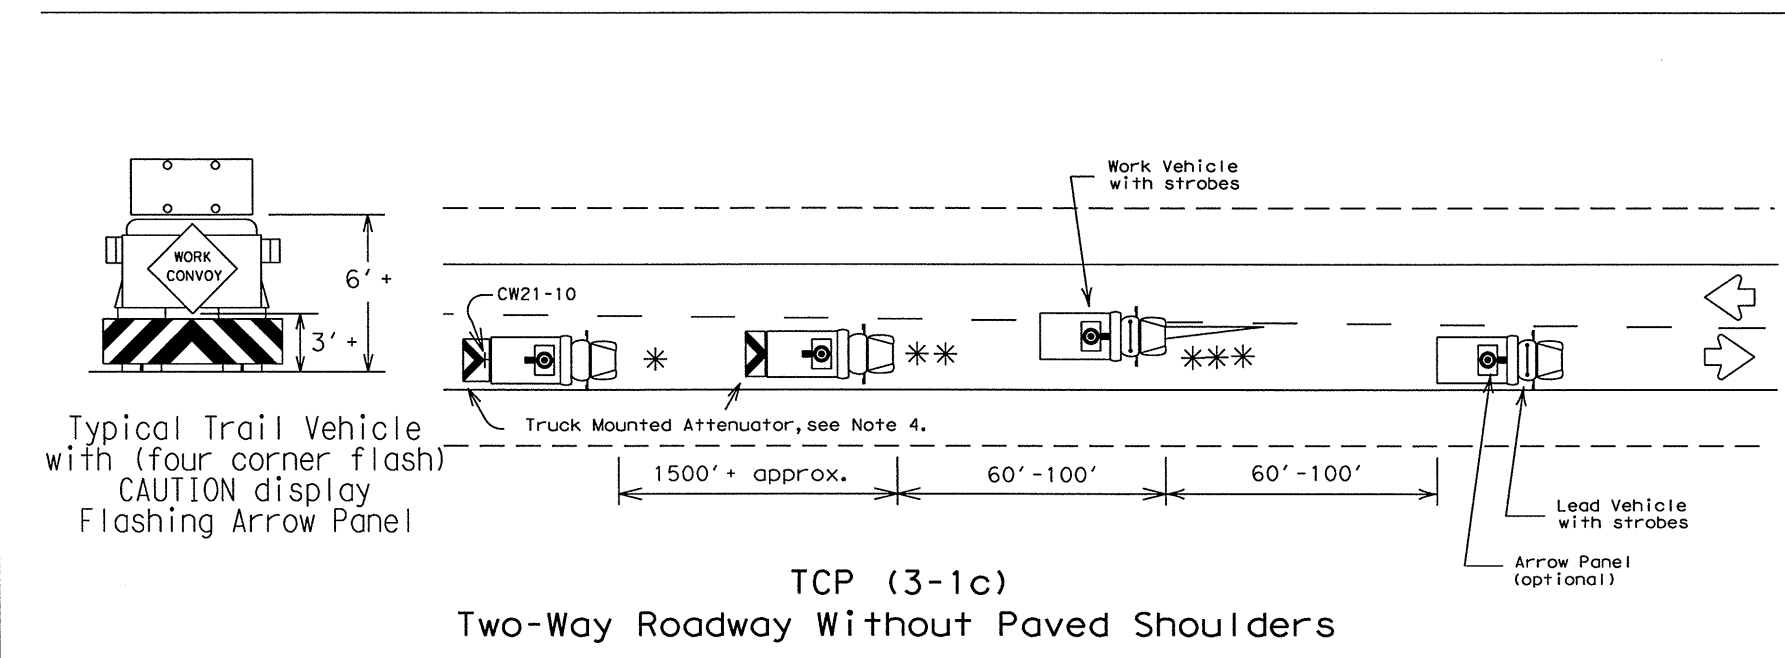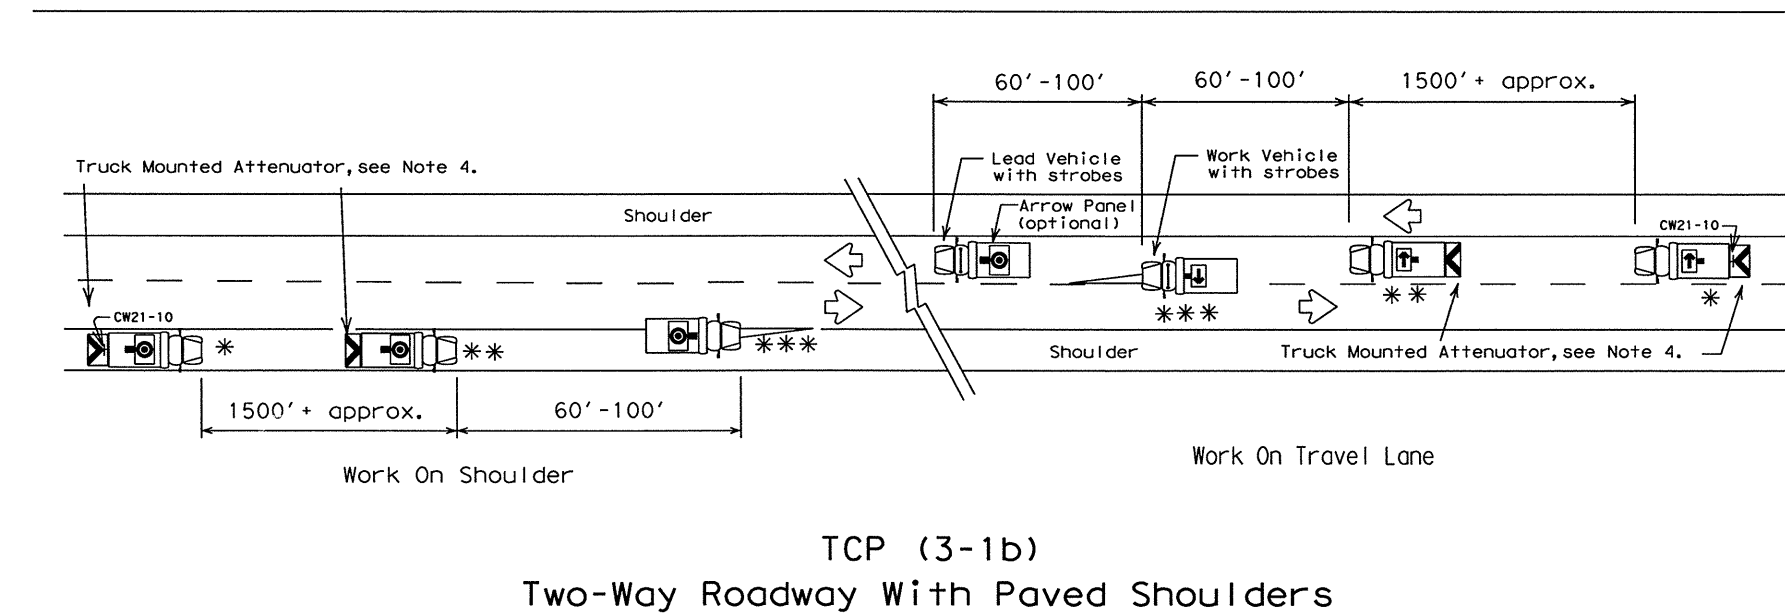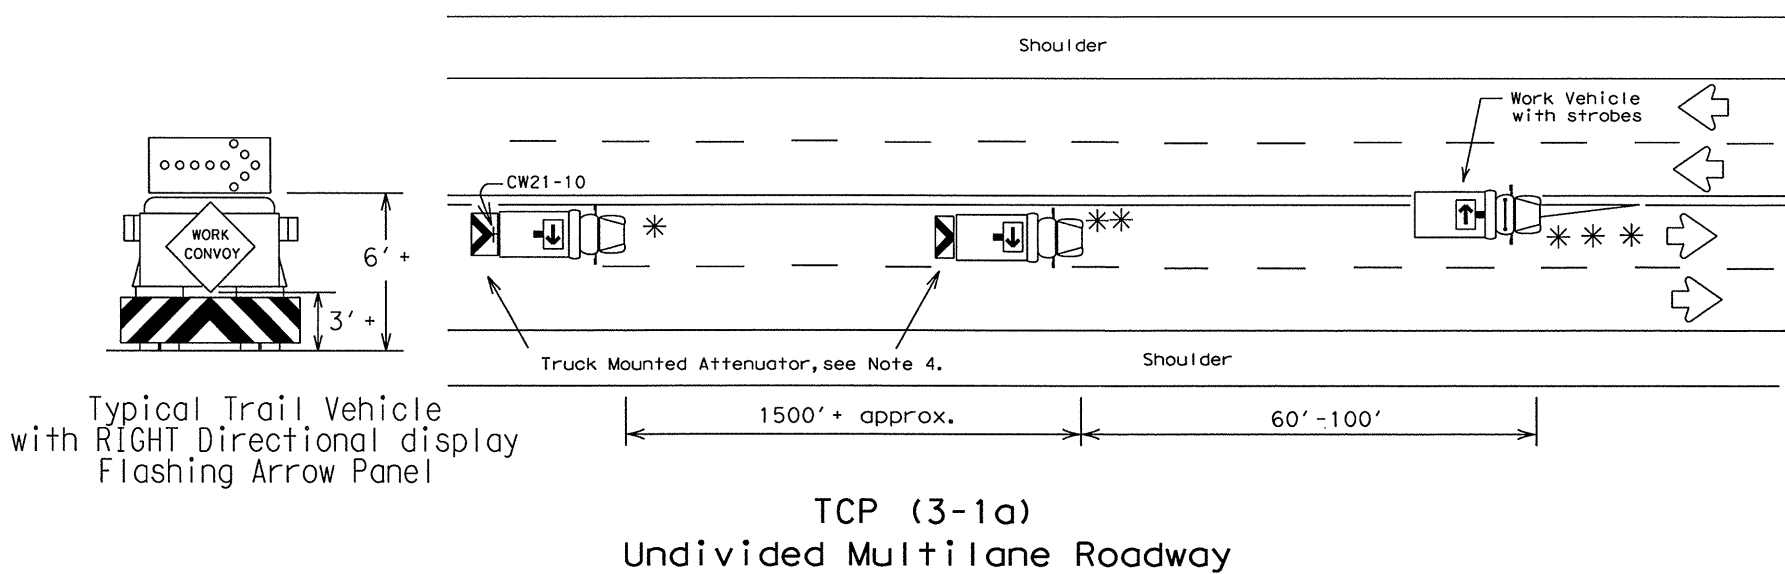

Legend:

- \* TRAIL VEHICLE
- \*\* SHADOW VEHICLE
- \*\*\* WORK VEHICLE
- Truck mounted attenuator
- HEAVY WORK VEHICLE

Arrow Panel Displays

- RIGHT Directional
- LEFT Directional
- RIGHT or LEFT Directional
- CAUTION mode

CW21-10

LETTERS = BLACK  
BORDER = BLACK  
BACKGROUND = ORANGE

- GENERAL NOTES:
1. TRAIL, SHADOW, LEAD, and work vehicles shall be equipped with arrow panels as illustrated. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
  2. All traffic control devices shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD), latest edition.
  3. The use of yellow rotating beacons or strobe lights on vehicles are required unless otherwise stated elsewhere in the plans.
  4. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and the TRAIL VEHICLE are required.
  5. Optional striping on the back panel of all truck mounted attenuators shall be 8" red and white reflective sheeting placed in an inverted "V" design. Reflective sheeting shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION D-9-8300, TYPE C.
  6. Flashing Arrow Panels shall be Type B or Type C as per BC Standards. The panel operation shall be controlled from inside the vehicle.
  7. Each vehicle shall have two-way radio communication capability.
  8. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
  9. Vehicle spacing between TRAIL VEHICLE and SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE.

Only pre-qualified products shall be used. A list of compliant products and their sources may be obtained by writing or faxing:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3335  
Fax (512) 416-3161  
E-mail TRF-STANDARD@mailgw.dot.state.tx.us

Shadow and trail vehicle shall be equipped with Truck Mounted Attenuator.

Red Reflective  
White Reflective

45°

(HEIGHT OF TMA) ± 6"

(WIDTH OF TMA) ± 6"

OPTIONAL STRIPING FOR TMA

STRIPING FOR TMA WILL BE REQUIRED ON ALL PROJECTS AWARDED AFTER JANUARY 1, 2000

STANDARD PLANS  
TEXAS DEPARTMENT OF TRANSPORTATION  
Traffic Operations Division

TRAFFIC CONTROL PLAN  
MOBILE OPERATIONS  
UNDIVIDED HIGHWAYS

TCP (3-1)-98


REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
2-94	DALLAS	6	C 261-3-47, etc.	9
8-95				
1-97				
4-98				

COUNTY	CONTROL	SECTION	JOB	HIGHWAY
DALLAS	0261	03	047, etc.	VARIOUS

UN	DATE:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CK:	ACC:	17	18	19	20	12	22	32	42	52	62	72	82	93	3	132	
DW:	FILE:	33	35	45	36	53	78	99	4	12	34	44	55	46	47	18	
CK:		49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	



DN:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CK:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DW:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CK:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16



FOR USE WITH REGULATORY SIGNS ONLY

Legend - Black  
Border - Black  
Background - Orange Refl.

Legend - Black  
Border - Black  
Background - Orange Refl.

Legend - Black  
Border - Black  
Background - Orange Refl.

Legend - Black  
Border - Black  
Background - Orange Refl.

TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS

for surfacing projects only

Standard pavement markings to be placed within 14 calendar days after temporary flexible-reflective roadway marker tabs

Type Y-2 temporary flexible-reflective roadway marker tabs

40' ± 1'

10'

30'

Paint & Beads

Temporary flexible-reflective roadway marker tabs placed to indicate beginning and end of no passing zones, or optional

## GENERAL NOTES

The traffic control devices detailed on this sheet will be furnished and erected as directed by the Engineer on sections of roadway where the surfacing operation has covered or obliterated existing pavement markings. These traffic control devices are to be used to supplement those required by BC Standards.

"DO NOT PASS" SIGN (R4-1) and NO-PASSING ZONES

Prior to the beginning of construction, all currently striped no-passing zones should be signed with the DO NOT PASS sign (R4-1) and PASS WITH CARE sign (R4-2) placed at the beginning and end of each zone for each direction of travel except as otherwise provided herein. Signs marking these individual no-passing zones need not be covered prior to construction if the signs supplement the existing pavement markings.

At the discretion of the Engineer, in areas of numerous no-passing zones, several zones may be combined and signed as a single zone. If passing is to be prohibited over one or more lengthy sections, a DO NOT PASS sign and a NEXT XX MILES sign (R20-11) may be used at the beginning of such zones. The DO NOT PASS and NEXT XX MILES signs should be repeated every mile to the end of the no-passing zone. In areas where there is considerable distance between no-passing zones, the end of a no-passing zone may be signed with a PASS WITH CARE and NEXT XX MILES sign.

Depending on traffic volumes and length of sections, it may be desirable to prohibit passing throughout the project to prevent damage to windshields and lights. The DO NOT PASS and NEXT XX MILES sign should be used and repeated as often as necessary for this purpose. Where several existing zones are to be combined into one individual no-passing zone, the sign at the beginning of the zone should be covered until the surfacing operation has passed this location so as not to have the DO NOT PASS sign conflict with existing pavement markings. Also, unless one days operation completes the entire length of such combined zones, care must be taken to place DO NOT PASS and PASS WITH CARE signs in order to sign the beginning and end of the no-passing zones in the area where the surfacing operation has stopped for the day.

R4-1 and R4-2 signs should be mounted on fixed supports as detailed on BC Standards. These signs are to remain in place until standard pavement markings are placed.

"NO CENTER STRIPE" SIGN (CW21-15)

At the time construction activity obliterates the existing centerline (low volume roads may not have an existing centerline), a NO CENTER STRIPE sign (CW8-12) should be erected at each end of the work area and just beyond major rural intersections and other location deemed necessary by the Engineer. Where possible, the signs erected at each end of the work area should be located in such a manner that drivers can read the sign and immediately see the change to no centerline. The NO CENTER STRIPE sign should be supplemented with the NEXT XX MILES sign (CW21-16) mounted below it.

The NO CENTER STRIPE sign should be erected as detailed on BC Standards. These signs are to remain in place until standard pavement markings are placed.

"LOOSE GRAVEL" SIGN (ECW8-7)

When construction begins, a LOOSE GRAVEL sign (ECWB-7) should be erected at each end of the work area and repeated at intervals of approximately two (2) miles in rural areas and closer in urban areas. The LOOSE GRAVEL sign should be supplemented with the NEXT XX MILES sign (CW21-16) mounted below it.

The LOOSE GRAVEL sign should be erected as detailed on BC Standards. They should remain in place until the loose gravel condition no longer exists.

## PAVEMENT MARKINGS

Short term pavement markings for surfacing projects shall use Temporary Flexible-reflective Roadway Marker Tabs. Tabs are to be installed to provide true alignment for striping crews or as directed by the Engineer. Tabs will be placed at the spacing indicated. Tabs should be applied to the pavement no more than two (2) days before the surfacing is applied. After the surfacing is rolled and swept the cover over the reflective strip shall be removed. Tabs shall NOT be used to simulate edge lines.

Only pre-qualified products shall be used. A list of compliant products and their sources may be obtained by writing or faxing:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3335  
Fax (512) 416-3161  
E-mail TRF-STANDARDEmailgw.dot.state

TYPICAL USAGE:				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	✓

 **STANDARD PLANS**  
**TEXAS DEPARTMENT OF TRANSPORTATION**  
*Traffic Operations Division*

TRAFFIC CONTROL DETAILS  
for  
SURFACING OPERATIONS  
TCP (7-1) -98

C) TexDOT March 1991		DN - LR	CK - MT	DN - DN	CK -	NEG. NO.:	
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO				SHEET
4-92	DALLAS	6	C 261-3-47, etc.				11
1-97			COUNTY	CONTROL	SECTION	JOB	HIGHWAY
4-98			DALLAS	0261	03	047, etc.	VARIOUS

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  
17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32  
33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48  
49 50 51 52 53 54 55 56 57 58 59 60 61 62 63

Barricade and Construction (BC) Standard Sheets General Notes:  $\Delta$

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of traffic control devices, construction pavement markings, and typical construction signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO) "Policy on the Geometric Design of Highways and Streets" or the TxDOT "Roadway Design Manual".
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor will erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign will be revised to show appropriate work zone distance.
7. The Engineer may require duplicate construction warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. As shown on BC(2), the OBSERVE WARNING SIGNS STATE LAW, BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits.
11. Except for devices required by Note 10, traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

4/03 Revision  
 $\Delta$  Revised General Notes




 **STANDARD PLANS**  
**TEXAS DEPARTMENT OF TRANSPORTATION**  
Traffic Operations Division

**BARRICADE AND CONSTRUCTION**  
**GENERAL NOTES**  
**AND REQUIREMENTS**


1 of 12 BC(1)-03

REVISIONS	STATE	FEDERAL	PROJECT NUMBER	SHEET
4-03	DAL 6	6	C-261-3-47, etc.	12
	COUNTY	CONTROL	SECTION	JOB
	DALLAS	0261	03	047 VA



LEVELS DISPLAYED										ACC:					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	

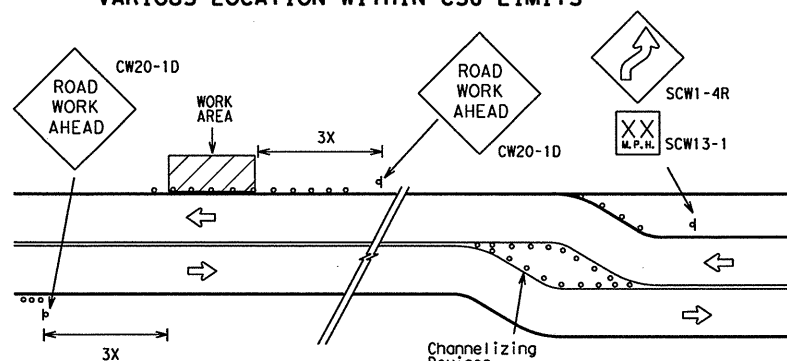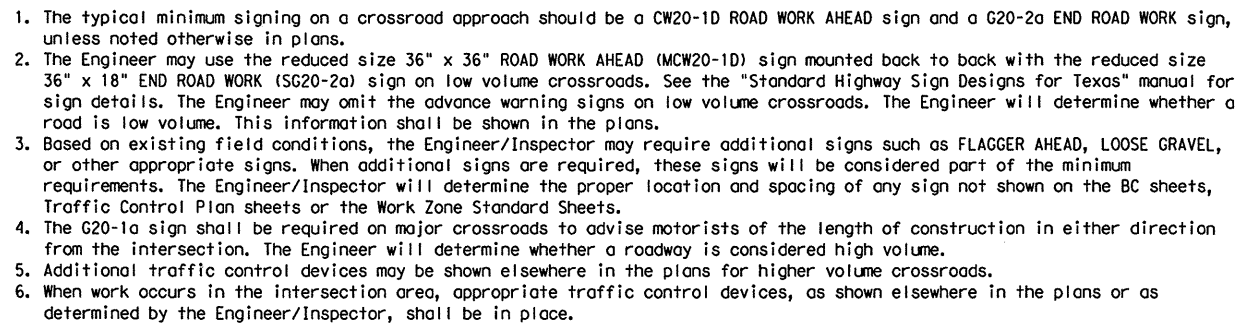

**TYPICAL SIGNING AND TRAFFIC CONTROL DEVICE DETAILS FOR WORK BEGINNING AT THE CSJ LIMITS**  
(Less than 2000 feet between project limits and work area) (Typical signing shall be installed at all CSJ Limits)

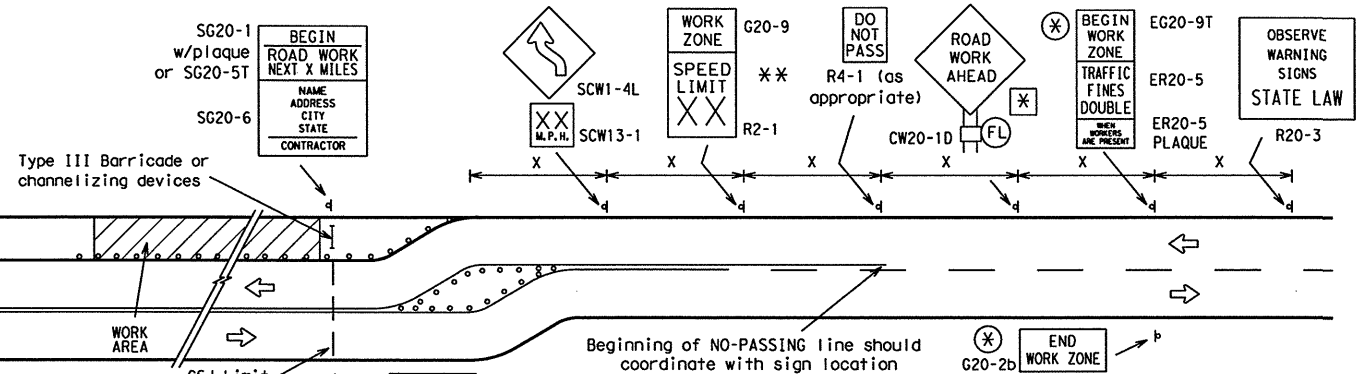

(\*) These signs shall be used when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a work zone where traffic fines may double if workers are present.



## CSJ LIMITS AT T-INTERSECTION

1. A ROAD WORK NEXT X MILES (G20-1bR(L)) sign should be erected on the intersected highway as shown above.
2. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
3. The Engineer/Inspector shall ensure that construction work zone signs are installed with adequate spacing between the signs so the legibility of existing permanent and other work zone signs is not obstructed.

Posted Speed	Sign $\Delta$ Spacing "X"	Long-term Or Intermediate-term Stationary Approach Warning Signs  CW20 and CW21 Series		Short-term Stationary Or Short Duration Approach Warning Signs  CW21 Series		Other Warning Signs
		Standard inches	Minimum <sup>4</sup> inches	Standard inches <sup>7</sup>	Minimum <sup>4</sup> inches <sup>7</sup>	
MPH	Feet (Apprx.)	48 x 48  				

General Notes:

1. Special or larger size signs may be used as necessary.
2. Distance between signs should be increased as required to have 1500 feet advance warning.
3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
4. For use only on secondary roads or city streets where speeds are low.
5. Only diamond shaped warning sign sizes are indicated.
6. See sign size listing in "TMUTCD", Appendix A or the "Standard Highway Sign Design" manual for complete list of available sign design sizes.
7. Where two sizes are listed, see sign size listing in "TMUTCD", Appendix A or the "Standard Highway Sign Design" manual for proper size.

**Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299**

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

**BARRICADE AND CONSTRUCTION  
PROJECT LIMIT  
STANDARD**

2 of 12 BC (2)-03

C TxDOT 11-4-02		ENR - BAS		CKI - GRB		DNI - FDN		CKI - CAL	
REVISIONS		STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO					SHEET
		DALLAS	6	C 261-3-47, etc.					13
COUNTY				CONTROL		SECTION		JOB	
DALLAS				0261		03		047, etc.	
								VARIOUS	




DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

LEVELS DISPLAYED:  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  
ACC:  
17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32  
33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48  
49 50 51 52 53 54 55 56 57 58 59 60 61 62 63

# TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones,"  
and approved by the Texas Transportation Commission.

Reduced speeds should only be posted in the vicinity  
of work activity and not throughout the entire project.

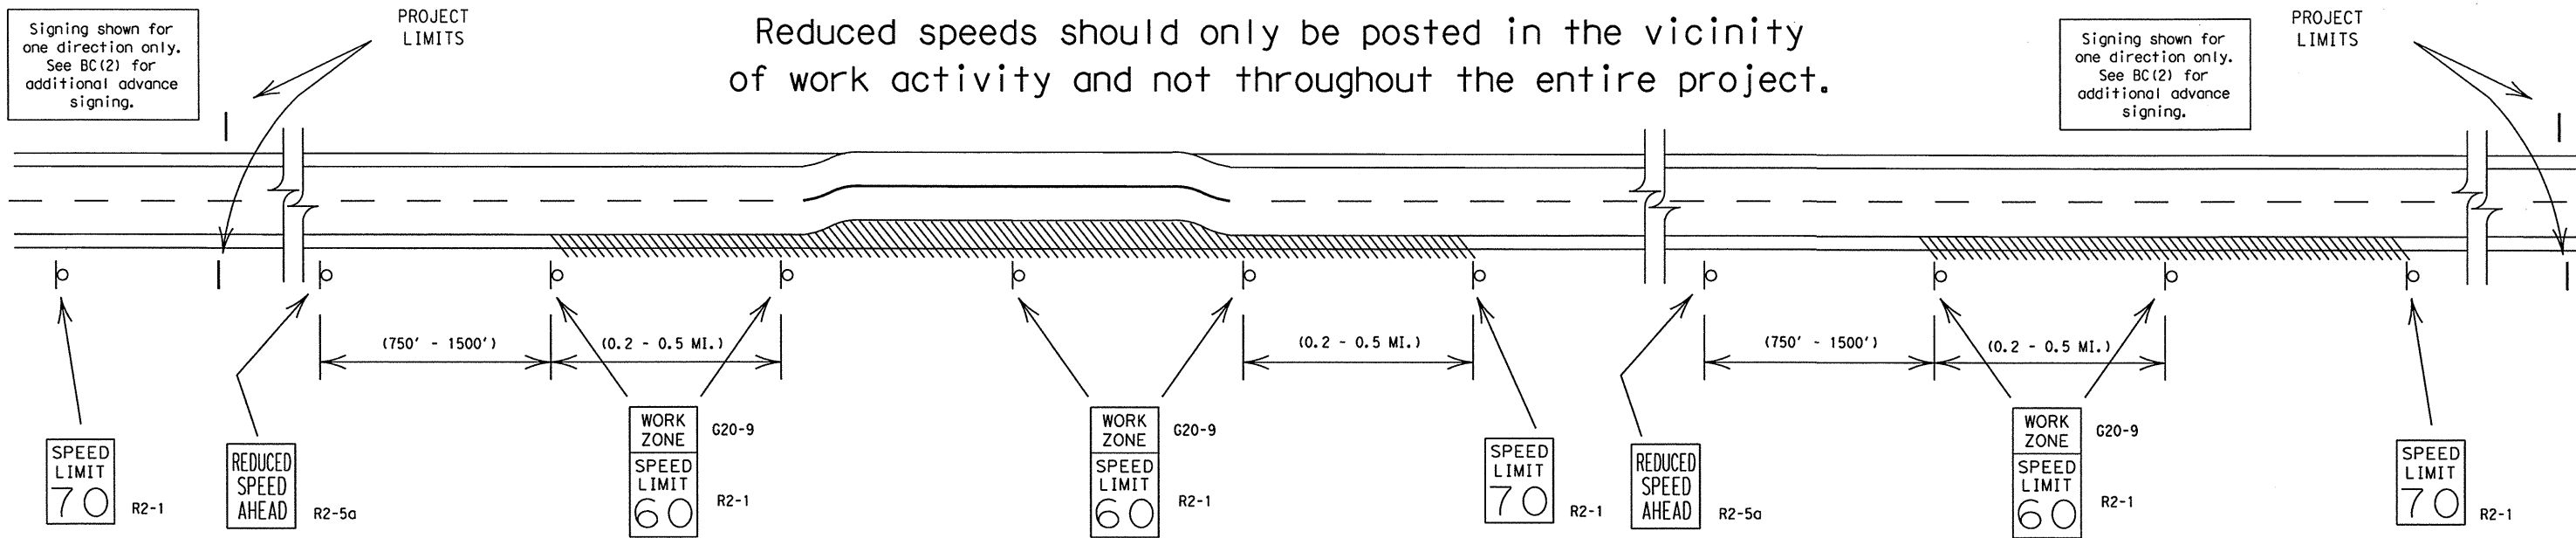

## GUIDANCE FOR USE:

### LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMIT signs should be posted and visible to the motorists at all times. Work activity in the area of reduced speed zone should be greater than 12 consecutive hours per day. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, work activity is within 15 feet of pavement edge or actually on the pavement.

SHORT TERM WORK ZONE SPEED LIMIT signs should be posted and visible to the motorists only when work activity is present. Work activity in the area of reduced speed should be less than 12 consecutive hours. When work activity is not present, signs should be covered with an approved sign cover or removed from work area.

## GENERAL NOTES:

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance. Regulatory work zone speed signs (R2-1) should be removed during periods when they are not needed to minimize interference with traffic.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of speed limit signs should be:  
40 mph and greater 0.2 to 2 miles  
35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background.
- Fabrication, erection and maintenance of REDUCED SPEED AHEAD sign, WORK ZONE plaque and SPEED LIMIT signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless otherwise noted.
- Techniques that may help reduce traffic speeds.  
(In order of effectiveness.)  
A. Flagger stationed next to sign.  
B. Law enforcement.  
C. Portable changeable message sign (PCMS).  
D. Low-power radar transmitter.
- Refer to "Work Zone Speed Limit Work Sheets 1 and 2" to determine when a construction speed zone should be required.

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT STANDARD

3 of 12


BC(3)-03

© TxDOT 11-4-02		DR - JMT	CK - GRB	DR - FDN	CK - CAL
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO		SHEET
	DALLAS	6	C 261-3-47, etc.		14
		COUNTY	CONTROL	SECTION	JOB
		DALLAS	0261	03	047, etc.
				HIGHWAY	VARIOUS

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63


## TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

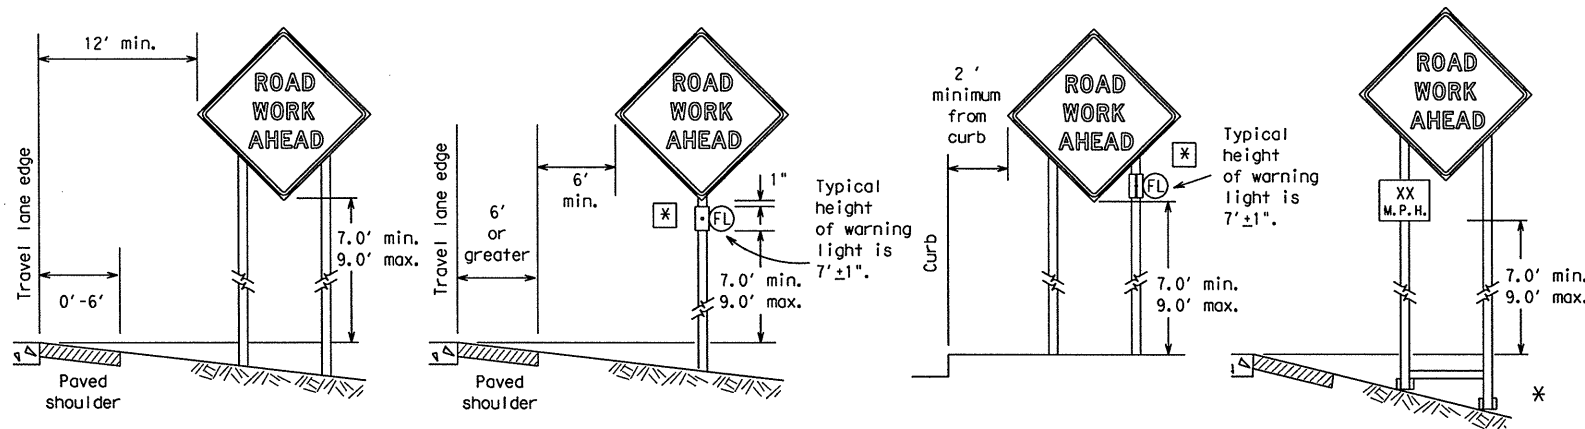

It is the intent of these plans to provide positive guidance to motorists throughout the project limits by the use of signs, pavement markings, delineation and/or channelizing devices. All traffic control devices shall conform with the "Texas Manual on Uniform Traffic Control Devices for Streets and Highways" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" list (CWZTCD).

\* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

## ATTACHMENT FOR WOODEN SIGN SUPPORTS

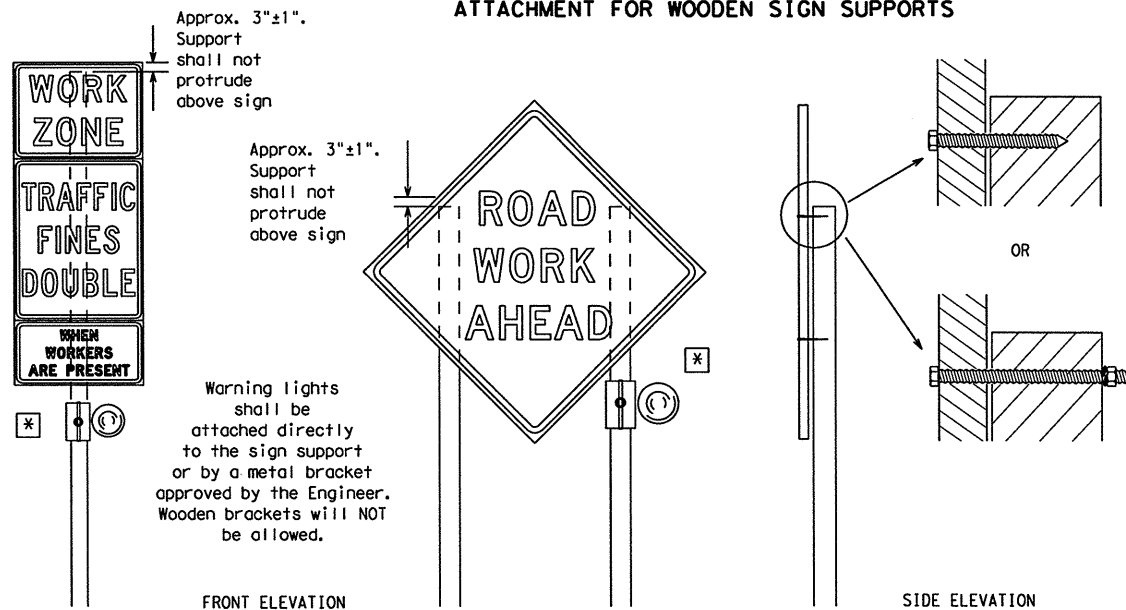

Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails will NOT be allowed.

Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Supports shall not be extended or repaired by splicing or other means.

## GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
  - Wooden sign posts shall be painted white.
  - Barricades shall NOT be used as sign supports.
  - Nails shall NOT be used to attach signs to any support.
  - All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
  - The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes. The additional signs requested by the Engineer/Inspector shall not be subsidiary.
  - The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD). The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so that the Engineer can verify the correct procedures are being followed.
  - The contractor is responsible for sign installations and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
  - Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1".
  - The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.
- Duration of Work (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part VI)**
- The types of sign supports, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring that the sign support and substrate meets crashworthiness and length of work requirements.
    - Long-term stationary - work that occupies a location more than 3 days.
    - Intermediate-term stationary - work that occupies a location from overnight to 3 days.
    - Short-term stationary - daytime work that occupies a location from 1 to 12 hours.
    - Short, duration - work that occupies a location up to 1 hour.
    - Mobile - work that moves intermittently or continuously. Does not stop for more than 15 minutes at a time.

## SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9.0 feet, above the paved surface regardless of work duration.

## SIZE OF SIGNS

- The Engineer may allow the use of smaller size construction warning signs on secondary roads or city streets where speeds are low if the sign size is listed as an option on the "Typical Construction Warning Sign Size and Spacing" chart shown on BC(2).
- The Contractor shall furnish the sign sizes shown in plans, the BC Sheets, the TCP sheets or as directed by the Engineer.

## SIGN SUBSTRATES

- The Contractor shall ensure that the sign substrate is allowed for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign faces.

## REFLECTIVE SHEETING

- Reflectorized signs shall be constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 or DMS-8310. The DMS specifications can be accessed from the following web address:  
[http://manuals.dot.state.tx.us:80/dynaweb/colmates/dms/@Generic\\_BookView](http://manuals.dot.state.tx.us:80/dynaweb/colmates/dms/@Generic_BookView)
- White sheeting, meeting the requirements of DMS-8300 Type C (High Specific Intensity), shall be used for signs with white background and channelizing devices.
- Orange sheeting, meeting the requirements of DMS-8300 Type E (Fluorescent Prismatic), shall be used for signs with orange backgrounds.

## SIGN LETTERS

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

## REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This type of sign support meets the crashworthiness standards regardless of the direction of impact. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face. These materials can damage the retroreflectivity of sign sheeting.
- Signs shall be removed upon completion of the work.

## SIGN SUPPORT WEIGHTS

- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects will not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact.
- Rubber (such as tire inner tubes) shall NOT be used for sandbags.
- Rubber ballasts (such as those used with cones or edgeline channelizers) shall NOT be used as sign support weights.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

FL Flashing Type A - Low Intensity Warning Light

\* The Type A Warning Lights shall not be used with Type E Sheeting (Fluorescent Prismatic) meeting the requirements of DMS-8300.

## CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC sheets or the CWZTCD. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES STANDARD

4 of 12 BC(4)-03


REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
1	DALLAS	6	C 261-3-47, etc.	15
	COUNTY	CONTROL	SECTION	JOB
	DALLAS	0261	03	047, etc.
				VARIOUS

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


LEVELS DISPLAY  
ACC:  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

EXAMPLES OF SKID MOUNTED SIGN SUPPORTS


LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS □

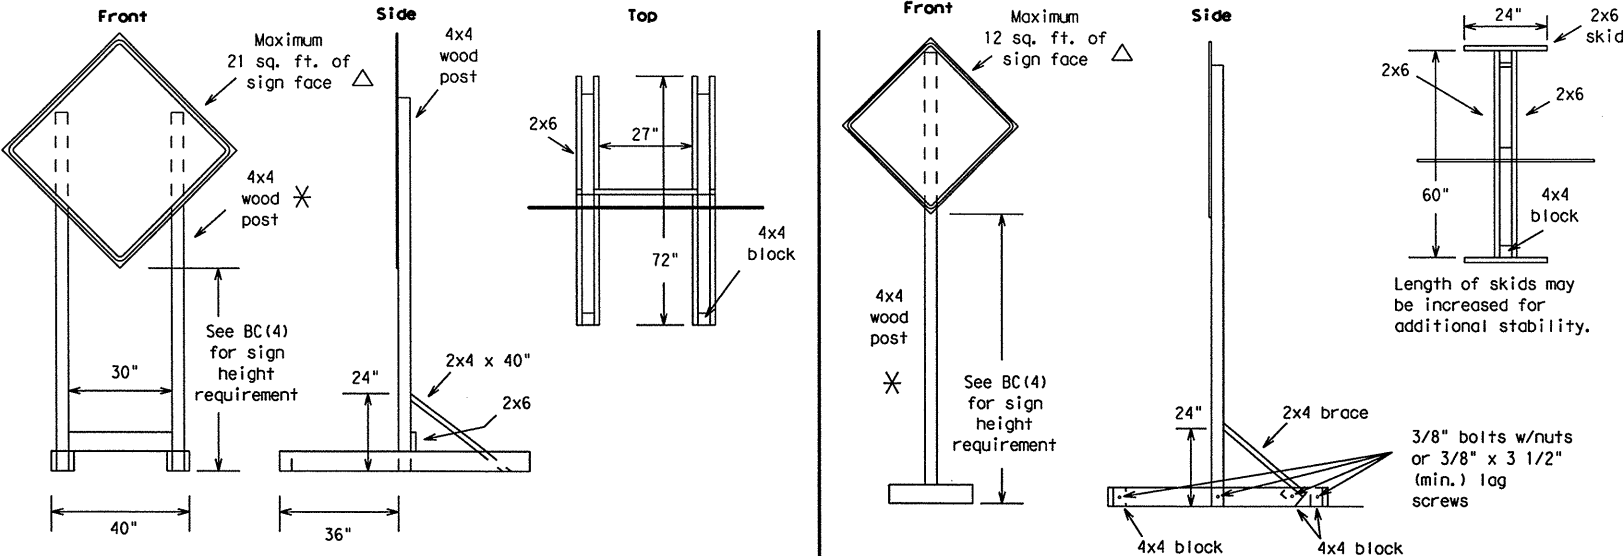

SHORT TERM STATIONARY/SHORT DURATION - PORTABLE SIGN SUPPORTS □

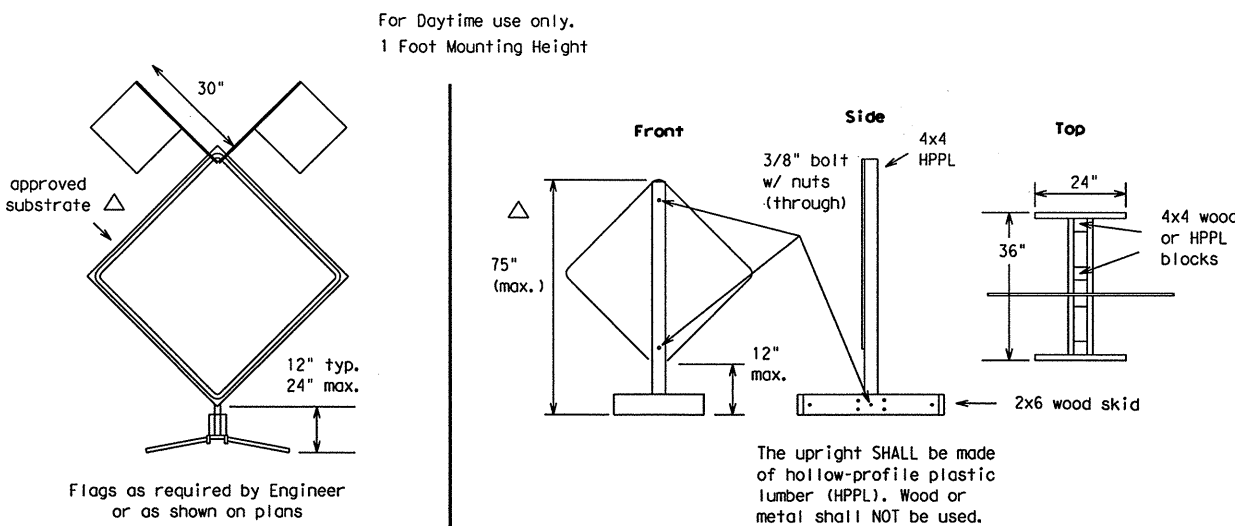

EXAMPLES OF GROUND MOUNTED SIGN SUPPORTS

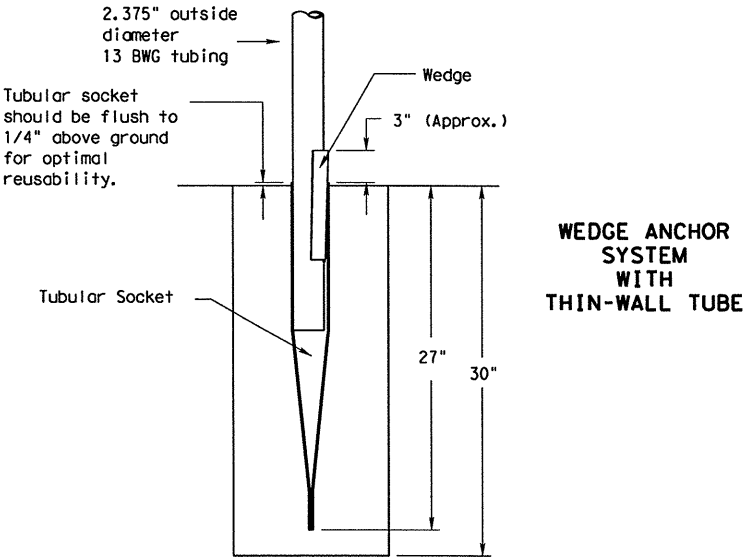


The wedge anchor system with thin wall tubing may be used to support up to 10 sq. ft. of sign area.

Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18 inches. When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18 inches or provide a minimum foundation depth of 30 inches. If solid rock is encountered, the socket/stub may be reduced in length as required to a min. length of 18 inches. Any material removed from the socket/stub shall be from the bottom and the clearance requirements shown above must still be adhered to. The inner surfaces of the socket/stub must remain free of debris. Install Wedge Anchor System per manufacturer recommendations. Attach the sign to the sign post. Insert the sign post into the socket and align the sign face with the roadway. Drive the wedge into the socket to secure post. This will leave approximately 3 inches of the wedge exposed.


Supports shall be straight within 1/4 inch per 5 feet of length and shall have a smooth, uniform finish free from defects affecting strength or appearance. Any bolt holes and sheared ends shall be free from burrs.

WING CHANNEL  
Lap-splice/base bolted anchor

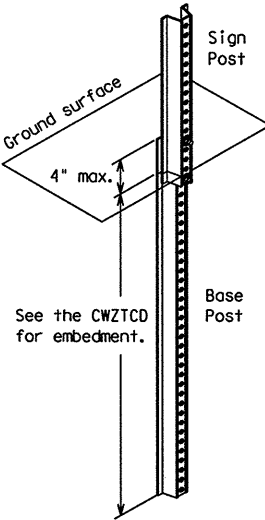

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

PERFORATED SQUARE METAL TUBING  
With Anchor

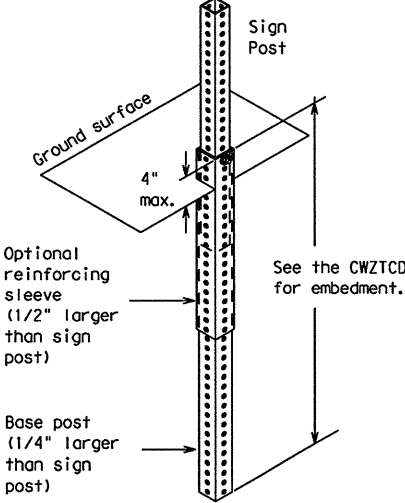


Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

WOOD POST SYSTEM  
FOR GROUND MOUNTED SIGN SUPPORTS



Nominal Post Size	No. of Posts	Maximum Sq. feet of Sign Face	Minimum Soil Embedment	Drilled Hole(s) Required
4 x 4	1	12	36"	NO
4 x 4	2	21	36"	NO
4 x 6	1	21	36"	YES
4 x 6	2	36	36"	YES

No more than 2 sign posts shall be mounted within a 7 ft. circle.

When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

□ See BC(4) for definition of "Work Duration."

✱ Sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.

△ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

BARRICADE AND CONSTRUCTION  
TYPICAL SIGN SUPPORT  
STANDARD

5 of 12 BC(5)-03

REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
	DALLAS	6	C 261-3-47, etc.	16
COUNTY	CONTROL	SECTION	JOB	HIGHWAY
DALLAS	0261	03	047, etc.	VARIOUS



DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

## PORTABLE CHANGEABLE MESSAGE SIGNS


- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- PCMS placed on the shoulder or within the R-O-W, but are not behind a concrete traffic barrier shall have a minimum of four plastic drums placed perpendicular to traffic, on the upstream side of the PCMS.
- Messages on PCMS should contain no more than 8 words (four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed.
- Each phase of the message should convey a single thought.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- Specify the actual days of the week; e.g., TUES THROUGH FRI or TUES-FRI in the coming week that work activity will occur.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for two seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the words "Danger" or "Caution" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated.

Word or Phrase	Abbreviation	Word or Phrase	Abbreviation
Access Road	ACCES RD	Miles	MI
Air Quality	AIR QLT	Miles Per Hour	MPH
Avenue	AVE	Time Minutes	Time MIN
Best Route	BEST RTE	Monday	MON
Boulevard	BLVD	Normal	NORM
Bridge	BRDG	North	N
Cannot	CANT	Parking	PKING
Center	CNTR	Parking Lot	PRK LOT
Construction Ahead	CONST AHEAD	Road	RD
Detour Route	DETOUR RTE	Right Lane	RGT LN
East	E	Saturday	SAT
Emergency	EMER	Service Road	SERV RD
Emergency Vehicle	EMER VEH	Shoulder	SHLDR
Entrance, Enter	ENT	Slippery	SLIP
Express Lanes	EXP LANE	South	S
Expressway	EXPWY	Speed	SPD
Distance Feet	Distance FT	Street	ST
Fog Ahead	FOG AHD	Sunday	SUN
Freeway	FRWY, FWY	Telephone	PHONE
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Highway	HWY	Travelers	TRVLRS
Hours	HR	Tuesday	TUES
Information	INFO	Turnpike	Name TRNPK
Left	LFT	Upper Level	UPPR LVL
Left Lane	LFT LN	Warning	WARN
Lane Closed	LN CLSD	Wednesday	WED
Lower Level	LOWR LVL	Weight Limit	WT LIMIT
Maintenance	MAINT	Wet Pavement	WET PVMT
Roadway designation #	IH-number, US-number, SH-number, FM-number	West	W


WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND CONCRETE TRAFFIC BARRIER.

## TYPICAL FLASHING ARROW PANEL

- The Flashing Arrow Panel should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Panels should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Panel.
- The Flashing Arrow Panel should be able to display the following symbols:

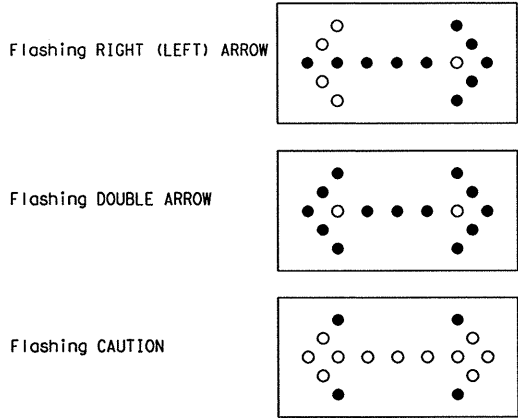

- The "CAUTION" display consists of four corner lamps flashing simultaneously.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Panel shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential Chevron display may be used during daylight operations.



- The Flashing Arrow Panel shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Panel SHOULD NOT BE USED to laterally shift all lanes of traffic on a multi-lane roadway at once.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION: Flashing Arrow Panels shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW PANEL FROM THE RIGHT-OF-WAY OR PLACE THE ARROW PANEL BEHIND CONCRETE TRAFFIC BARRIER.


### TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the National Cooperative Highway Research Report No. 350 (NCHRP 350).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the dates shown in the CWZTCD to ensure that the TMA meets the age requirements and the crashworthiness criteria established by the Federal Highway Administration (FHWA) for TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned approximately 100 feet or less in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is on an extended distance from the TMA.

## TYPE C DELINEATORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS


- Type C Delineators shall be prequalified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Type C Delineators can be found at the following Web site: <http://ftp.dot.state.tx.us/pub/txdot-info/gsd/pdf/dms8600preq.pdf>.
- Color of delineators shall be as specified in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD). The cost of the Type C Delineators shall be considered subsidiary to Item 502.

### CONCRETE TRAFFIC BARRIER (CTB)

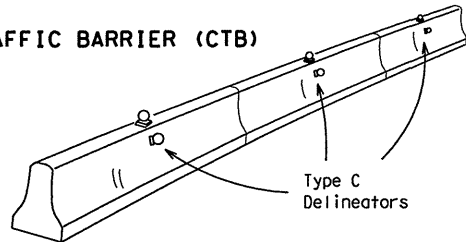


- Two (2) Type C Delineators should be mounted on each section of CTB in approximately the midsection of the CTB. The Type C Delineator on the side of the CTB shall be installed directly below the Type C Delineator mounted on top of the CTB.
- Maximum spacing of Type C Delineators is 40 feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attach Type C Delineators on CTB as per manufacturer's recommendations.
- Missing or damaged Type C Delineators shall be replaced as directed by the Engineer.

### LOW PROFILE CONCRETE BARRIER (LPCB)

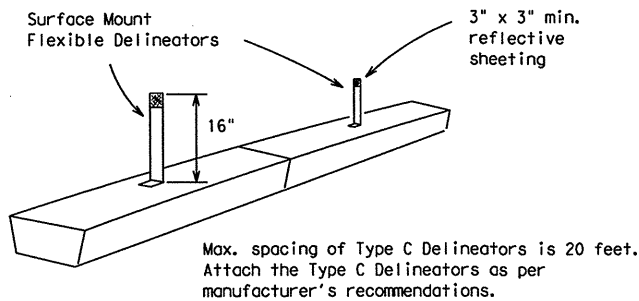

### DELINEATION OF END TREATMENTS

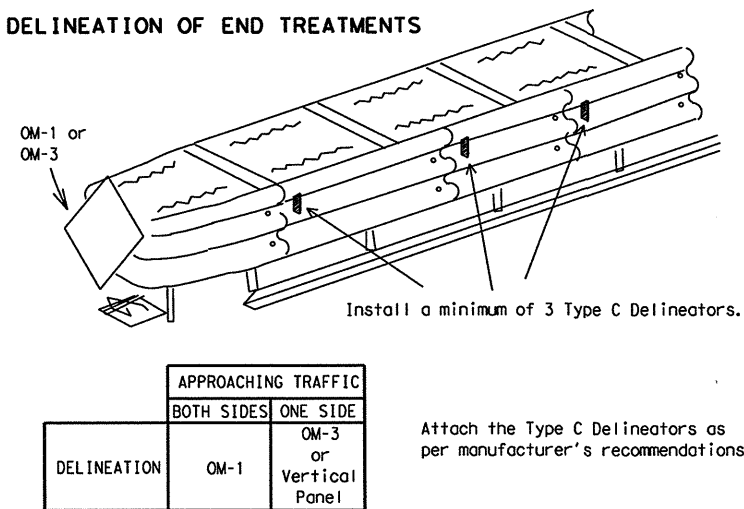

## WARNING LIGHTS

- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with signs. They are intended to warn of an approaching potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type E Sheeting (Fluorescent Prismatic) meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.

## END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet crashworthy standards as defined in the National Cooperative Highway Research Report 350. Refer to the CWZTCD List for approved end treatments and manufacturers.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division


## BARRICADE AND CONSTRUCTION ARROW & MESSAGE SIGNS, REFLECTORS & WARNING LIGHT STANDARD

6 of 12 BC(6)-03

© TxDOT 11-4-02	DN-BAS	CK-GRB	DN-FDN	CK-CAL
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
	DALLAS	6	C 261-3-47, etc.	17
	COUNTY	CONTROL	SECTION	JOB
	DALLAS	0261	03	047, etc.
				VARIOUS

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

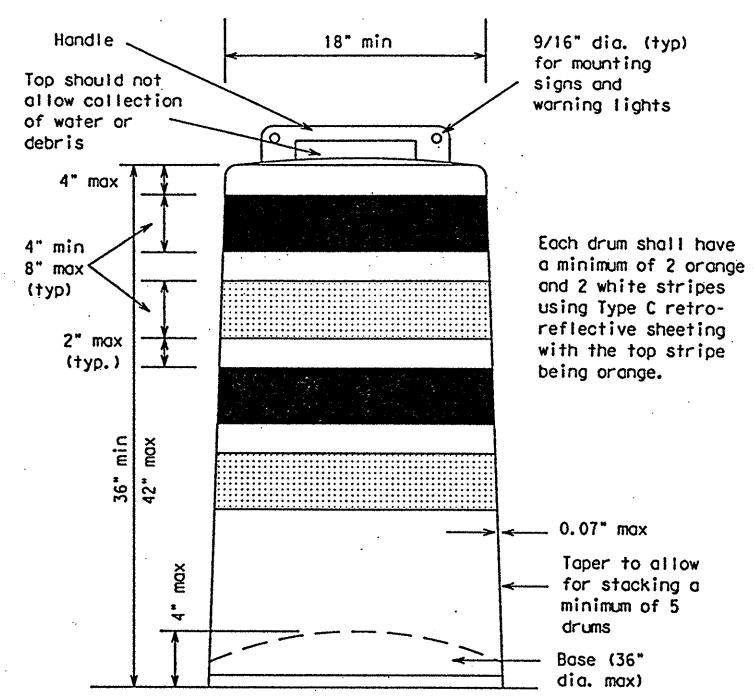

GENERAL NOTES

- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums or other traffic control devices identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

Prequalified plastic drums shall meet the following requirements:

GENERAL DESIGN REQUIREMENTS

- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelizing devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, delineator reflector unit or non-plywood sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a minimum unballasted weight of 7.7 lbs. and maximum unballasted weight of 11 lbs. The wall of the drum


body shall be a minimum of 0.07 inch in thickness. Weight of any drum supplied shall not vary more than 0.5 lb. from that of the prequalified sample.  
10. Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Flat Surface Reflective Sheeting." High Specific Intensity (Type C) retro-reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, checking, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.




Type C Warning Light or approved substitute mounted adjacent to the travel way.

WARNING LIGHTS AND DELINEATORS MOUNTED ON PLASTIC DRUMS

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A flashing warning lights are not intended for delineation and shall not be used in a series.
- Type C steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A and Type C warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- Type A Class 1, Type A Class 2, or Type B Reflector Units (D & OM Standard) may be attached to drums to delineate the intended vehicular path. The color of the reflector unit shall correspond to the pavement marking it is supplementing or for which it is substituting (left edgeline-yellow or right edgeline-white). The reflective unit shall be attached to the handle of the drum using the mounting hole nearest the travel lane and shall be aligned perpendicular to approaching traffic. Delineators may be used as directed by the Engineer. Delineators may not be used as a substitute for warning lights.
- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.


WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C WARNING LIGHTS



Warning reflector may be round or square. Must have a reflective surface area of at least 30 square inches

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectORIZED, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectORIZED sheeting. They do not have to be reflectORIZED where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type D (Non-fluorescent Prismatic).
- When used near two-way traffic, both sides of the warning reflector shall be reflectORIZED.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.

TYPICAL DETAIL OF LANE CLOSURE USING PLASTIC DRUMS AS CHANNELIZING DEVICES

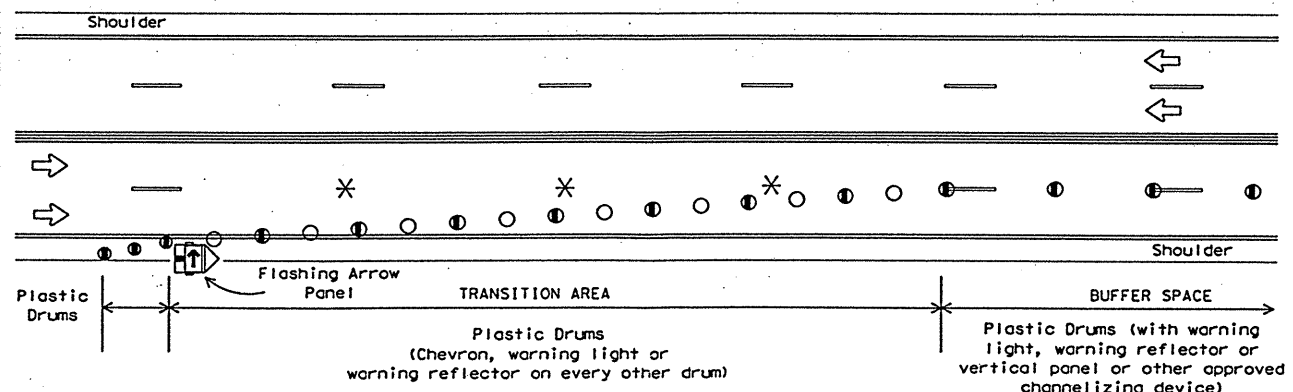


Provide adequate sight distance when placing lane closures. Do not place lane closures in vertical or horizontal curves.  
See BC(8) for table showing the spacing of channelizing devices in the taper and tangent section.


\* NOTE: Lane lines shall be removed when the lane closure occupies a location for longer than 2 weeks.

LEGEND

- Flashing Arrow Panel
- Plastic Drum
- Plastic Drum w/ approved channelizing device



18" x 24" Sign (Maximum Sign Dimension) Chevron CWI-8, Driveway sign. D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type E (Fluorescent Prismatic) sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Flat Surface Reflective Sheeting," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type C (High Specific Intensity). Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

BARRICADE AND CONSTRUCTION PLASTIC DRUM STANDARD

7 of 12 BC(7)-03

REVISIONS	STATE DISTRICT	FEDERAL REGION	FEDERAL AID PROJECT	COUNTY	CONTROL	SECTION	JOB	HIGHWAY
4-03	DAL 6	C 261-3-47	18	DALLAS	026103	047	VA	


4/03 Revision  
Revised note

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  
17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32  
33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48  
49 50 51 52 53 54 55 56 57 58 59 60 61 62 63

## CHANNELIZING DEVICES

### VERTICAL PANELS

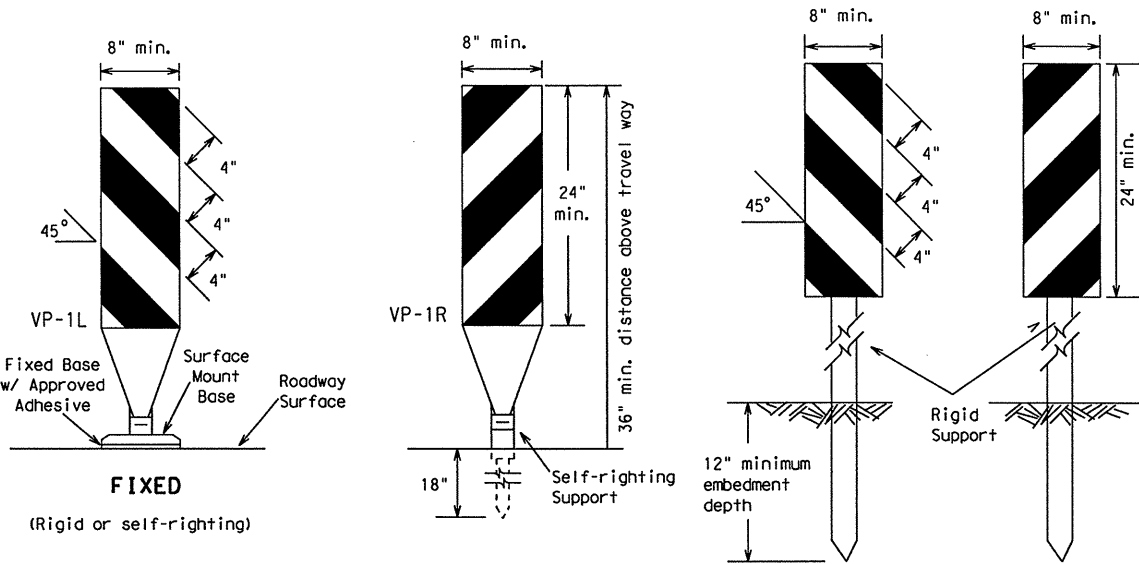


### DRIVEABLE

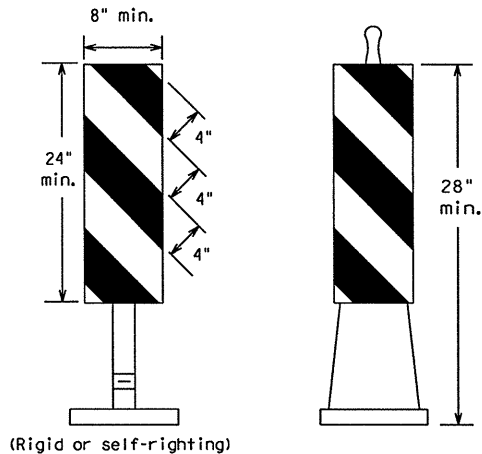

### PORTABLE


- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual Appendix B "Treatment of Pavement Drop-offs in Work Zones" for additional guidelines on the use of VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways, freeways, and on high speed roadways shall have a minimum of 2 square feet of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type C (High Specific Intensity) conforming to Departmental Material Specification DMS-8300, unless noted otherwise.

### OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

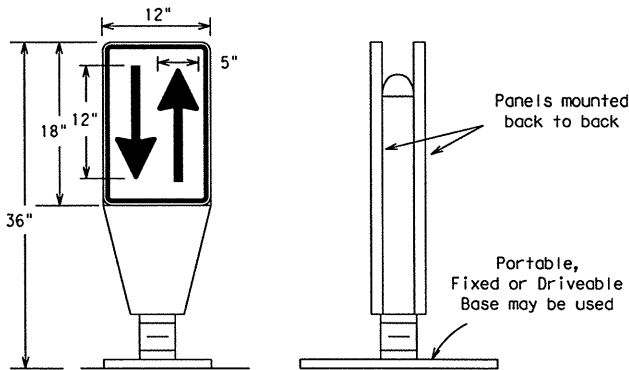

- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust. The OTLD is placed on a flexible self-righting support that returns to an upright position when impacted by a vehicle.
- The OTLD may be used in combination with simple tubular markers or vertical panels (vp's).
- Spacing between the OTLD shall not exceed 500 feet. Tubular markers or vp's placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type E (Fluorescent Prismatic) conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall be black vinyl non-reflective decal sheeting meeting the requirements of DMS-8320.

### CHEVRONS

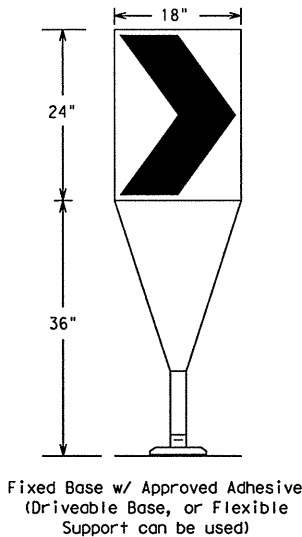

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black non-reflective legend. Sheeting for the chevron shall be retroreflective Type E (Fluorescent Prismatic) conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall be black vinyl non-reflective decal sheeting meeting the requirements of DMS-8320.

Posted Speed	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60' - 75'
35		205'	225'	245'	35'	70' - 90'
40		265'	295'	320'	40'	80' - 100'
45		450'	495'	540'	45'	90' - 110'
50	L = WS	500'	550'	600'	50'	100' - 125'
55		550'	605'	660'	55'	110' - 140'
60		600'	660'	720'	60'	120' - 150'
65		650'	715'	780'	65'	130' - 165'
70		700'	770'	840'	70'	140' - 175'
75		750'	825'	900'	75'	150' - 185'

\*\*Taper lengths have been rounded off.  
L=Length of Taper (FT.) W=Width of Offset (FT.) S=Posted Speed (MPH)

### GENERAL NOTES:


- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The contractor shall maintain devices in a clean condition and replace damaged, non-reflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh approximately 35 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.
- Examples on this sheet are the most commonly used channelizing devices in work zones. For other devices, refer to the CWZTCD.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

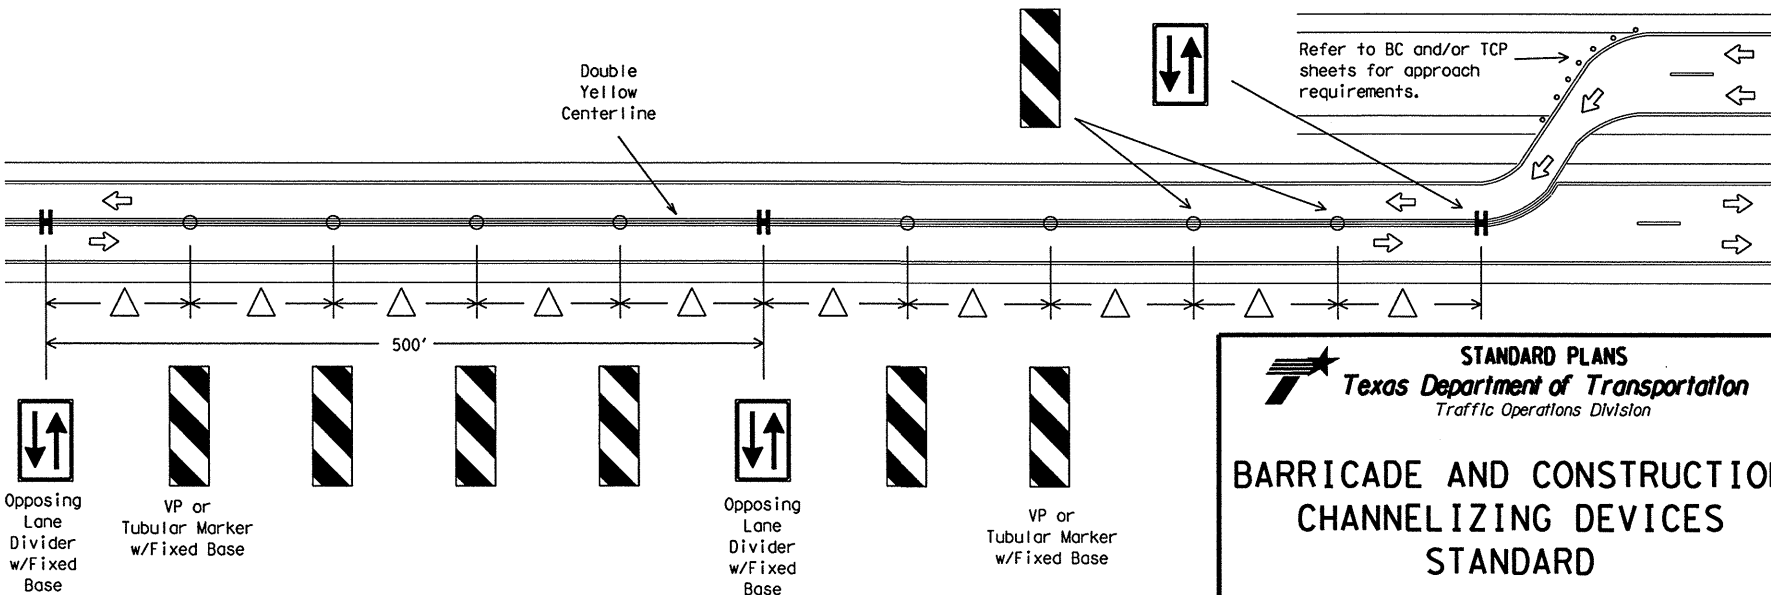

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES STANDARD

8 of 12 BC(8)-03

REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
	DALLAS	6	C 261-3-47, etc.	19
COUNTY	CONTROL	SECTION	JOB	HIGHWAY
DALLAS	0261	03	047, etc.	VARIOUS

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:

LEVELS DISPLAYED

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

### TYPE III BARRICADES



1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type III Barricades and a list of all materials used in the construction of Type III Barricades.
2. Type III Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.

**Barricades shall NOT be used as a sign support.**

#### TYPICAL STRIPING DETAIL FOR BARRICADE RAIL



#### TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

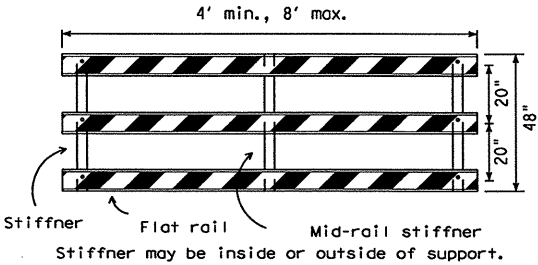


#### EDGE LINE CHANNELIZER

1. This device is intended only for use in place of a vertical panel to channelize traffic by indicating the edge of the travel lane.
2. This device shall not be used to separate lanes of traffic (opposing or otherwise) or warn of objects.
3. This device is based on a 42 inch, two-piece cone with an alternate striping pattern: four 4 inch retroreflective bands, with an approximate 2 inch gap between bands. The color of the band should correspond to the color of the edgeline (yellow for left edgeline, white for right edgeline) for which the device is substituted or for which it supplements. The reflectorized bands shall be retroreflective Type C (High Specific Intensity) conforming to Departmental Material Specification DMS-8300, unless otherwise noted.
4. The base must weigh a minimum of 30 lbs.


### TYPE III BARRICADE (POST AND SKID) TYPICAL APPLICATION

Each roadway of a divided highway shall be barricaded in the same manner.

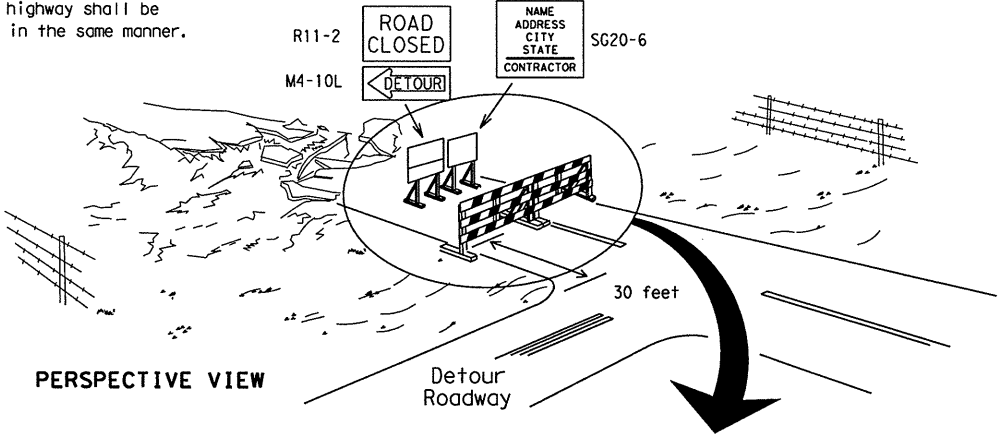

#### PERSPECTIVE VIEW



The three rails on Type III barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

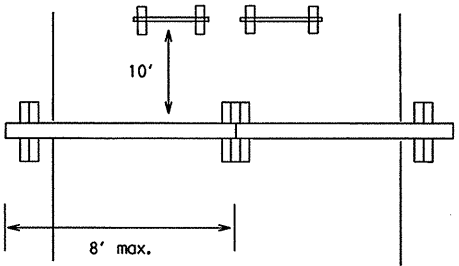

#### PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type III Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

### CONES

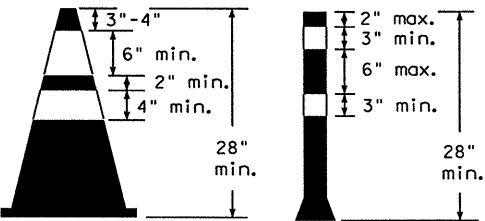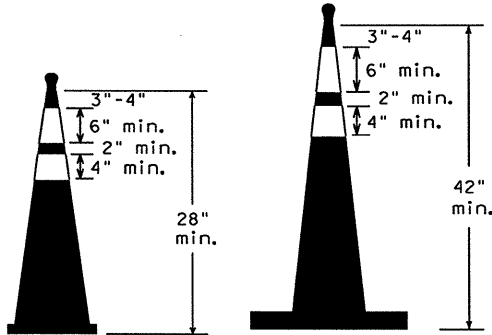


28" Cones shall have a minimum weight of 9 1/2 lbs.

42" 2-piece cones shall have a minimum weight of 30 lbs.


1. Traffic cones and tubular markers shall be a minimum of 28 inches in height when used either on freeways or at nighttime.
2. Cones or tubular markers shall be predominantly orange, fluorescent red-orange, or fluorescent yellow-orange. They should be kept clean and bright for maximum visibility.
3. Cones used only for daytime operations do not require the reflectorized bands.
4. Cones used for nighttime operations shall be reflectorized. Reflectorized material shall have a smooth, sealed outer surface that displays the same approximate color during the day and night. The reflectorized bands shall be retroreflective Type C (High Specific Intensity) conforming to Departmental Material Specification DMS-8300, unless otherwise noted.
5. When used at night, appropriate personnel shall ensure that cones and tubular markers remain in their proper location and in an upright position.
6. Reflectorization of cones shall consist of a minimum 6 inch band placed at least 3 inches but not more than 4 inches from the top, supplemented by a minimum 4 inch band spaced a minimum of 2 inches below the 6 inch band.
7. Reflectorization of tubular markers shall be a minimum of two 3 inch bands placed a maximum of 2 inches from the top with a maximum of 6 inches between bands. The reflectorized bands shall be retroreflective Type C (High Specific Intensity) conforming to Departmental Material Specification DMS-8300, unless otherwise noted.
8. One-piece cones or tubular markers are generally suitable for temporary usage (up to 8 hours) with other channelization devices such as vertical panels, drums or two-piece cones for long term usage. Care should be taken to ensure they remain in their proper location and in an upright position.
9. Cones or tubular markers used on each project shall be of the same size and shape.
10. The handle may be designed as a hook or other shape, fabricated from non-rigid materials similar to the cone material, and may extend up to a maximum of 8 inches above the top of cone. Length of the handle shall not be considered with regard to the overall height of the cone.

### CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

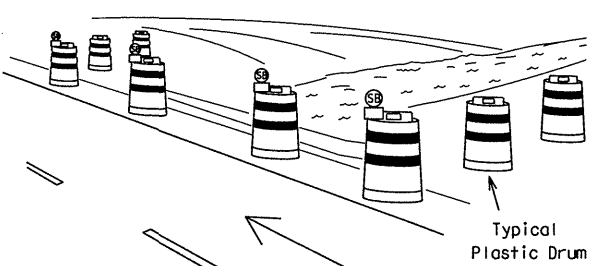

#### PERSPECTIVE VIEW

These drums are not required on one-way roadway

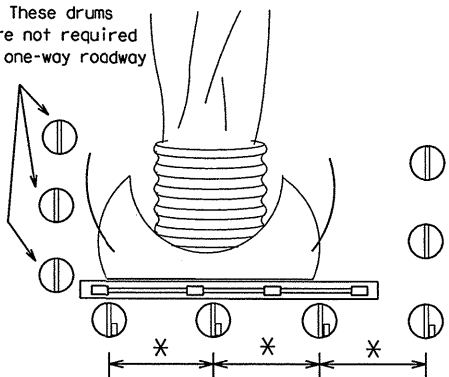

#### Legend

- Plastic drum
- Plastic drum with steady burn light

#### PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

Increase number of plastic drums on the side of approaching traffic if the crown width makes it necessary. (minimum of 2 and maximum of 4 drums)

\* Maximum spacing between drums shall be 10 feet. A minimum of two drums shall be used across the work area.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION TYPE III BARRICADE & CONES STANDARD

9 of 12

BC(9)-03

© TxDOT 11-4-02	DN- BAS	CK- GRB	DN- FDN	CK- CAL
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
	DALLAS	6	C 261-3-47, etc.	20
	COUNTY	CONTROL	SECTION	JOB
	DALLAS	0261	03	047, etc.
				VARIOUS



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	

## WORK ZONE PAVEMENT MARKINGS

### GENERAL

1. The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
2. Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
3. Additional supplemental pavement marking details may be found in the plans or specifications.
4. Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
5. When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
6. When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and the sections where passing is permitted.
7. All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

### RAISED PAVEMENT MARKERS

1. Raised pavement markers are to be placed according to the patterns on BC(11).
2. All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.
3. A list of prequalified reflective raised pavement markers can be found at the following web site:  
<ftp://ftp.dot.state.tx.us/pub/txdot-info/gsd/pdf/dms4200preq.pdf>
4. A list of prequalified non-reflective traffic buttons can be found at the following web site:  
<ftp://ftp.dot.state.tx.us/pub/txdot-info/gsd/pdf/4300preq.pdf>

### PREFABRICATED PAVEMENT MARKINGS

1. Removable prefabricated pavement markings shall meet the requirements of DMS-8241. A list of prequalified products can be found at the following web site:  
<ftp://ftp.dot.state.tx.us/pub/txdot-info/gsd/pdf/pavemark.pdf>
2. Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240 or the TxDOT Purchase Specification No. 550-74-89. A list of prequalified products and a copy of the TxDOT Purchase Specifications can be found at web sites:  
<ftp://ftp.dot.state.tx.us/pub/txdot-info/gsd/pdf/pavement.pdf>  
<ftp://ftp.dot.state.tx.us/pub/txdot-info/gsd/pdf/tss/tss377.pdf>


### MAINTAINING WORK ZONE PAVEMENT MARKINGS

1. The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
2. Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 150 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
4. Markings failing to meet this criteria shall be replaced as required by the Engineer at the expense of the Contractor.

### REMOVAL OF PAVEMENT MARKINGS

1. Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway, shall be removed or obliterated before the roadway is opened to traffic.
2. The above shall not apply to detours in place for less than two weeks, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
3. Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernible marking, by any method that does not materially damage the surface or texture of the pavement.
4. The removal of pavement markings may require resurfacing or seal coating portions of the roadway.
5. Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
6. Blast cleaning may be used but will not be required unless specifically shown in the plans.
7. Over-painting of the markings SHALL NOT BE permitted.
8. Removal of raised pavement markers shall be as directed by the Engineer.
9. Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.

## Temporary Flexible-Reflective Roadway Marker Tabs

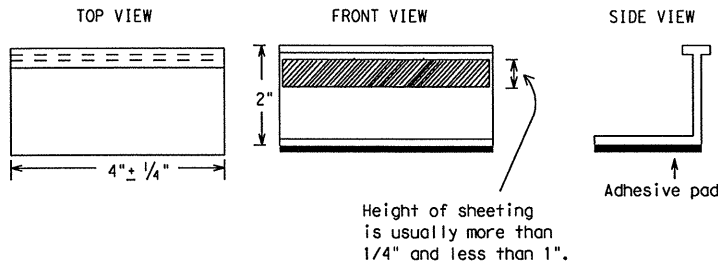

STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE

1. Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
2. Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
  - A. Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
  - B. Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
3. Small design variances may be noted between tab manufacturers.

## Raised Pavement Markers used as Guidemarks

1. Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
2. All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
3. Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:

- YELLOW - (two amber reflective surfaces with yellow body).
- WHITE - (one silver reflective surface with white body).

### DEPARTMENTAL MATERIAL SPECIFICATIONS

PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PREFABRICATED PAVEMENT MARKINGS-PERMANENT	DMS-8240
PREFABRICATED PAVEMENT MARKINGS-REMOVABLE	DMS-8241
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS	DMS-8242

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.



STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS STANDARD

10 of 12

BC(10)-03

© TxDOT February 1998	DR - LR	CR - DTN	DR - FDN	CR - CAL
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
1-97	DALLAS	6	C 261-3-47, etc.	21
2-98				
11-02	COUNTY	CONTROL	SECTION	JOB
	DALLAS	0261	03	047, etc.
				VARIOUS

DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


ACC:

LEVELS DISPLAYED

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100


## PAVEMENT MARKING PATTERNS

### CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

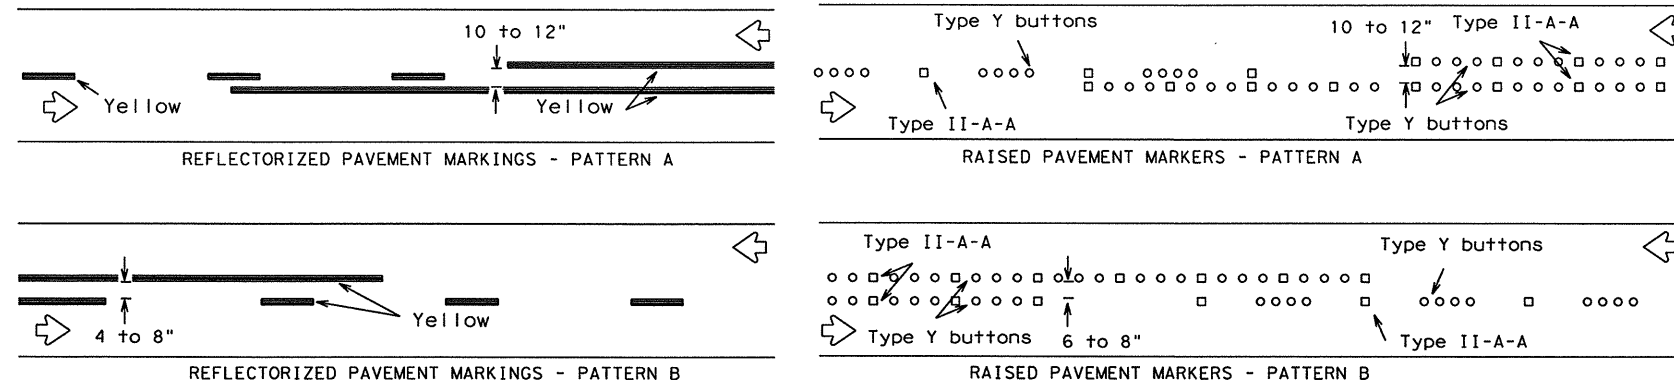


Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

### EDGE & LANE LINES FOR DIVIDED HIGHWAY

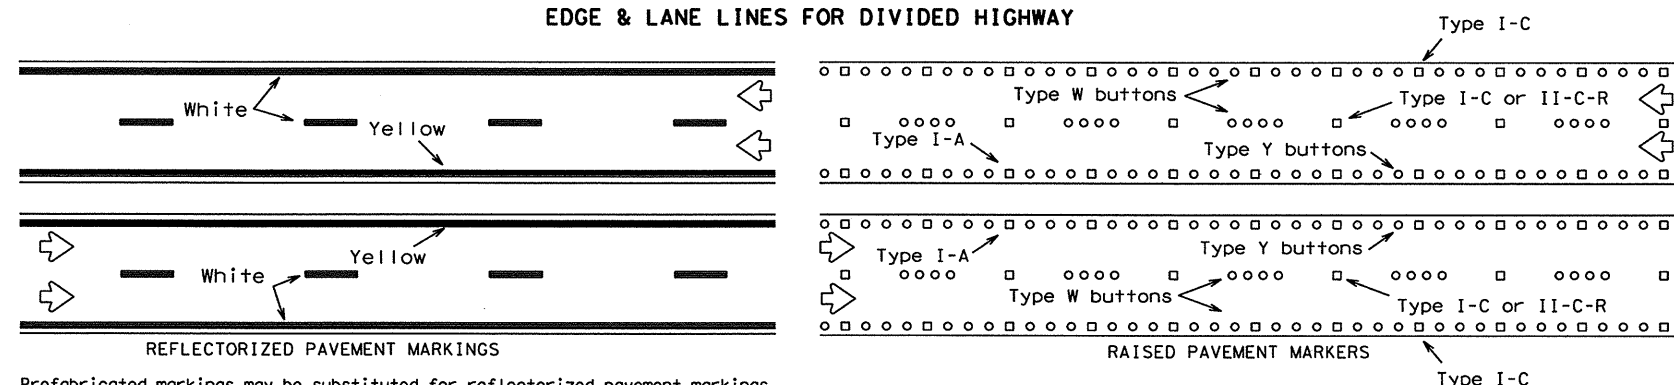


Prefabricated markings may be substituted for reflectorized pavement markings.

### LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

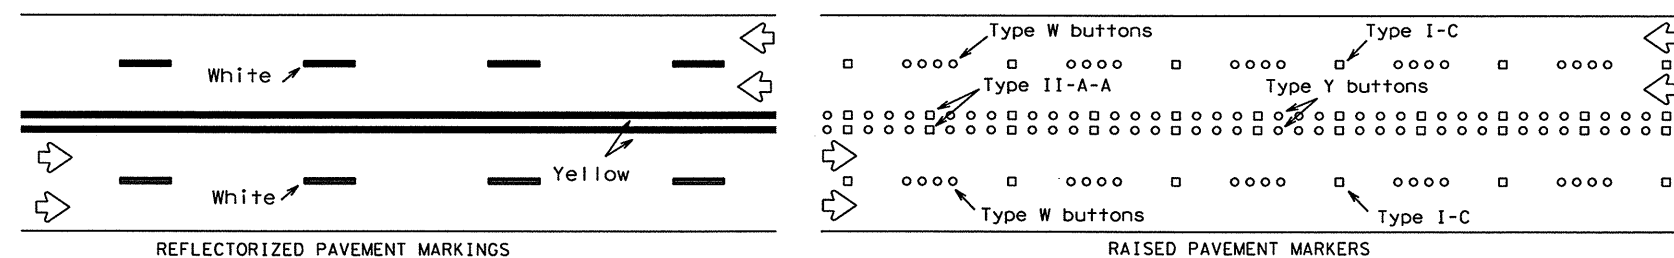


Prefabricated markings may be substituted for reflectorized pavement markings.

### TWO-WAY LEFT TURN LANE

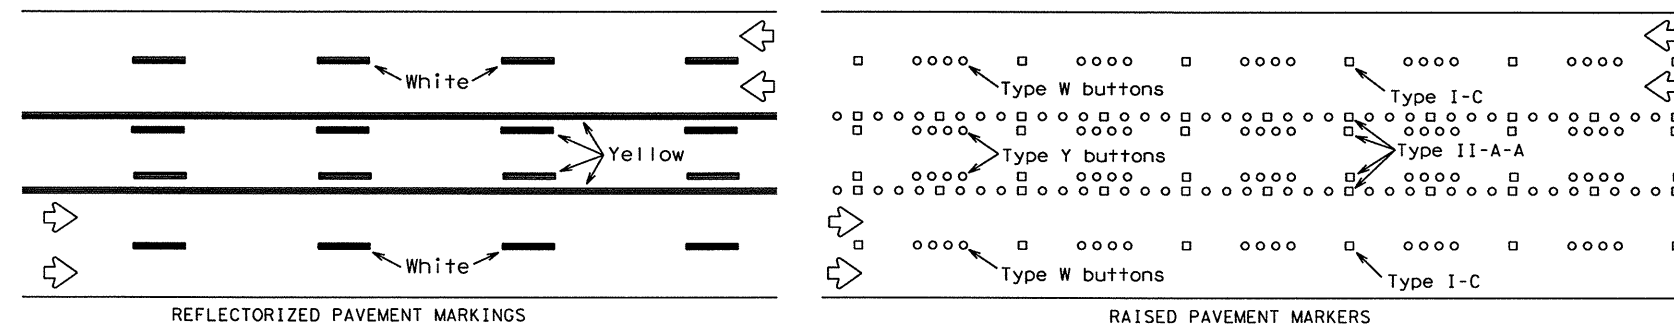

Prefabricated markings may be substituted for reflectorized pavement markings.

## STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

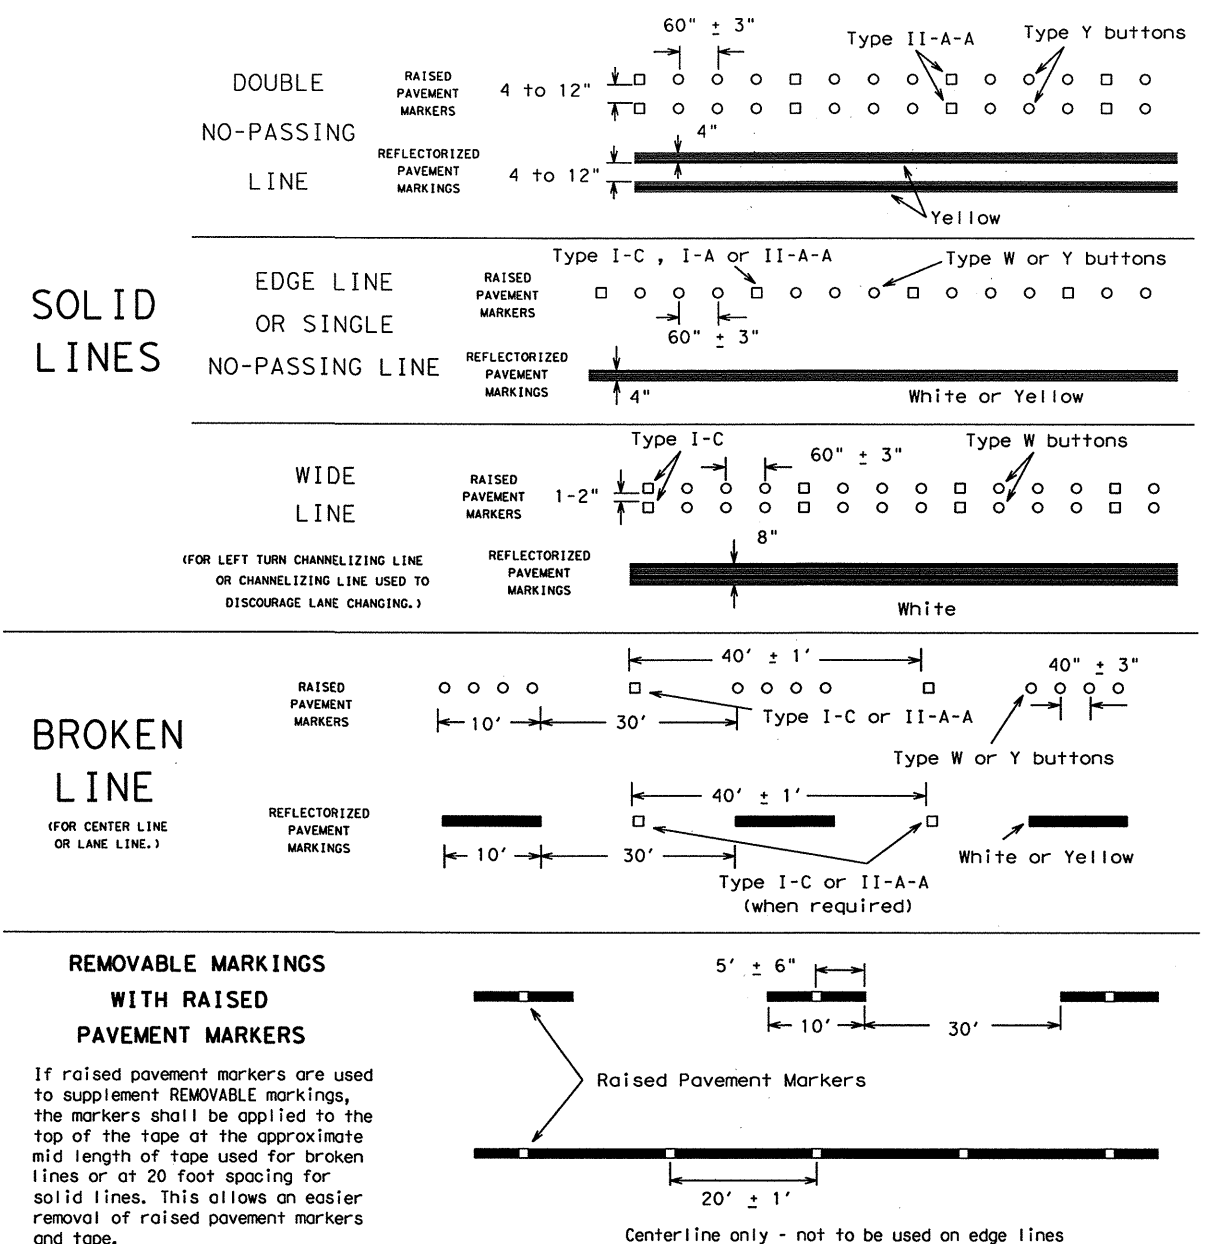

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Functional Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
again click on "Compliant Work Zone Traffic Control Devices".  
This site is printable.

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item "RAISED PAVEMENT MARKERS."

STANDARD PLANS  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS STANDARD


11 of 12 BC(11)-03

REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
2-94	DALLAS	6	C 261-3-47, etc.	22
1-97				
2-98				
11-02	DALLAS	0261	03 047, etc.	VARIOUS


DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:


LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

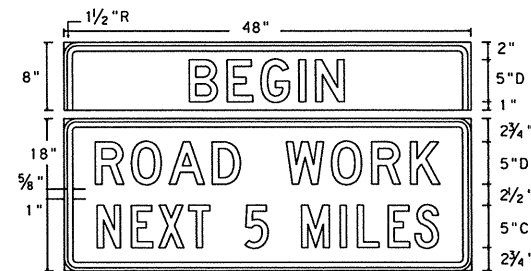

**SG20-1 w/plaque**  
48" X 26"  
Letters - Black  
Numbers - Black  
Border - Black  
Background - Orange Refl.

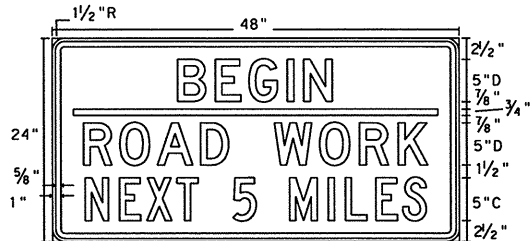


**SG20-5T**  
48" X 24"  
Letters - Black  
Numbers - Black  
Border - Black  
Background - Orange Refl.




**M4-9N**  
Variable X 12"  
Letters - Black  
Border - Black  
Background - Orange Refl.

The M4-9R, L or S sign is to be used to detour local streets or roads that are not a State or Federal numbered highway; however, it should not be used in lieu of the M4-10 sign at the beginning of the de-


tour or to detour State or Federal numbered routes. Also, when the M4-9R, L or S sign is used, a sign (M4-9N) with the name of the street being detoured may be mounted above it.

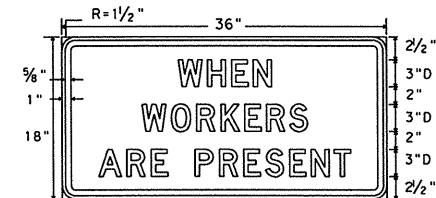


**ER20-5 Plaque**  
36" X 18"  
Letters - Black  
Border - Black  
Background - White Refl.

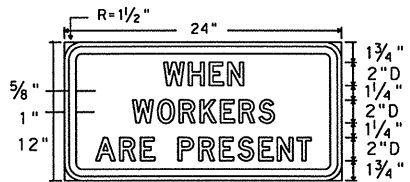


**R20-5 Plaque**  
24" X 12"  
Letters - Black  
Border - Black  
Background - White Refl.

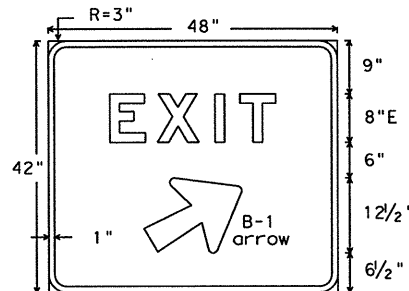


**E5-1a**  
48" X 42"  
Letters - White Refl.  
Arrow - White Refl.  
Border - White Refl.  
Background - Green Refl.



**B-1 Arrow Detail**




**D-70a**  
18" X 18"  
Letters - White Refl.  
Symbol - White Refl.  
Border - White Refl.  
Background - Blue Refl.




**D-70S**  
42" X 14"  
Letters - White Refl.  
Symbol - White Refl.  
Border - White Refl.  
Background - Blue Refl.

\* Alternate first line legend for D-70S


RESTAURANT **D70R**  
BUSINESS **D70B**  
MOTEL **D70M**  
GAS **D70G**

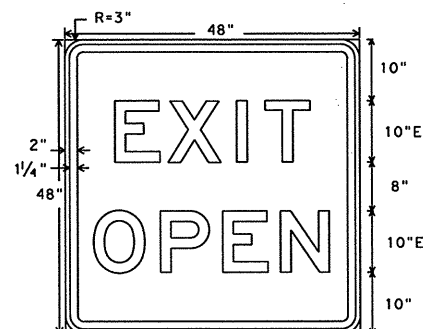

**E5-2**  
48" X 48"  
Letters - Black  
Border - Black  
Background - Orange Refl.

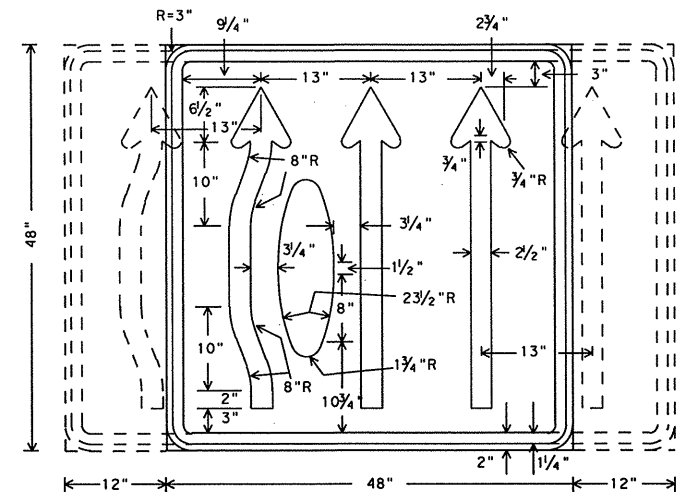

**CW24-2**  
Var. X 48"  
A mirror image may be used to show proper lane alignment.

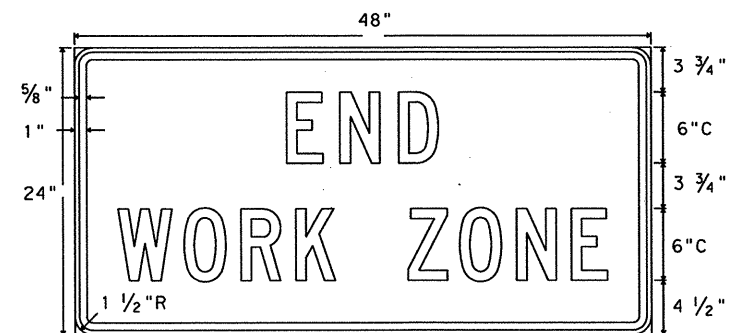

**G20-2b**  
48" X 24"  
Letters - Black  
Border - Black  
Background - Orange Refl.

DEPARTMENT MATERIAL SPECIFICATIONS	
PLYWOOD SIGN BLANKS	DMS-7100
ALUMINUM SIGN BLANKS	DMS-7110
FLAT SURFACE REFLECTIVE SHEETING	DMS-8300
VINYL NON-REFLECTIVE DECAL SHEETING	DMS-8320


COLOR		REFLECTIVE SHEETING OR OTHER MATERIAL	
BLUE	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)	
RED	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)	
GREEN	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)	
ORANGE	BACKGROUND	TYPE E (FLUORESCENT PRISMATIC)	
WHITE	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)	
YELLOW	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)	
BLACK	LEGEND & BORDERS	VINYL NON-REFLECTIVE DECAL SHEETING	
WHITE	LEGEND & BORDERS	TYPE C (HIGH SPECIFIC INTENSITY)	

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:


Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT".  
Click on "Functional Organizational Chart".  
Click on Traffic Operations Box.  
Click on "Compliant Work Zone Traffic Control Devices", again click on "Compliant Work Zone Traffic Control Devices". This site is printable.

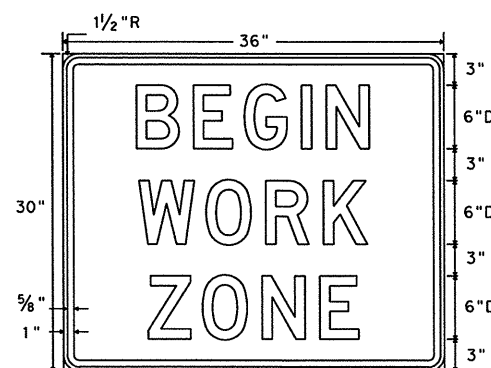

**EG20-9T**  
36" X 30"  
Letters - Black  
Border - Black  
Background - Orange Refl.

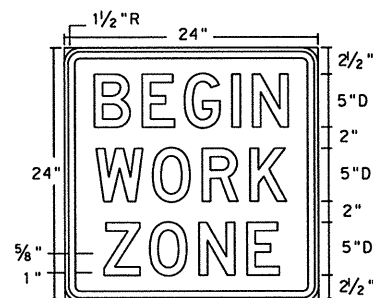

**G20-9T**  
24" X 24"  
Letters - Black  
Border - Black  
Background - Orange Refl.

**STANDARD PLANS**  
Texas Department of Transportation  
Traffic Operations Division

## BARRICADE AND CONSTRUCTION REGULATORY & GUIDE SIGNS STANDARDS


12 of 12 BC(12)-03

© TxDOT February 1998		DN - GRB	CK - BAS	DN - FDN	CK - CAL
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO		SHEET
10-99	DALLAS	6	C 261-3-47, etc.		23
11-02			COUNTY	CONTROL SECTION	JOB
	DALLAS		0261	03	047, etc.
					VARIOUS


DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  
17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32  
33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48  
49 50 51 52 53 54 55 56 57 58 59 60 61 62 63

CHANNELIZING DEVICES FOR URBAN ROADWAY TYPE PROJECT

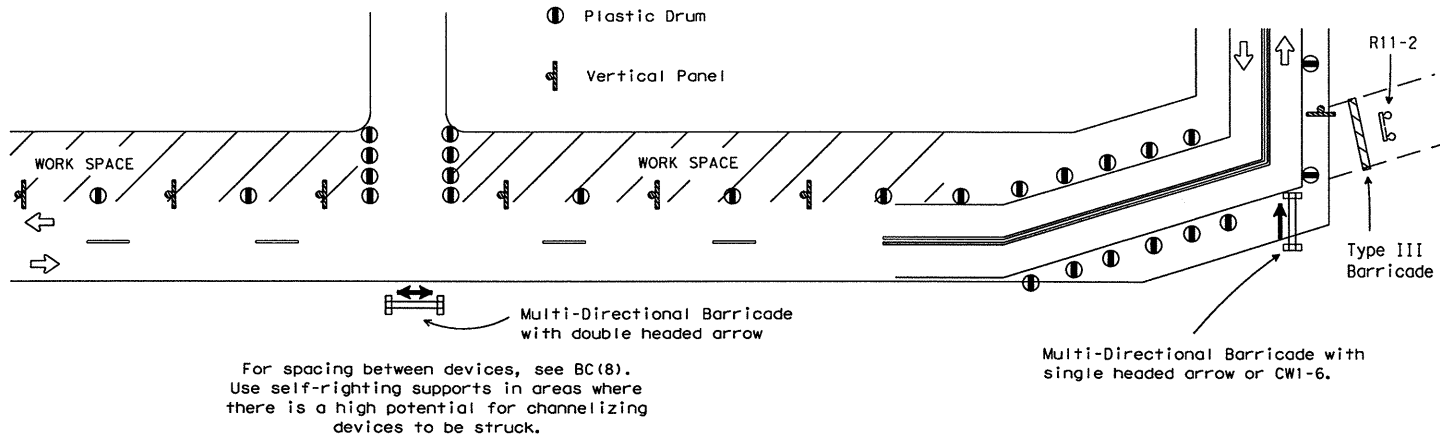

BARRIER DELINEATION WITH SAFETY GLARE FENCE

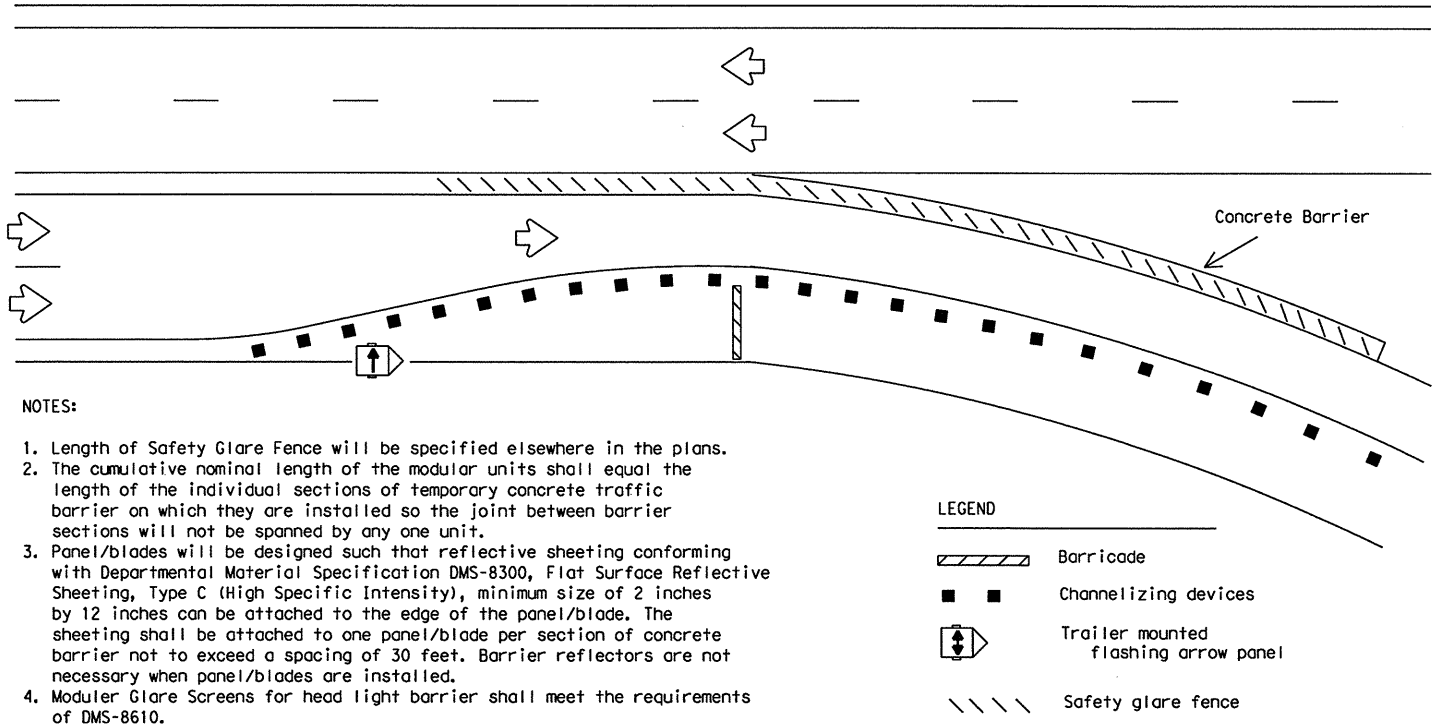

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer  
Traffic Operations Division - TE  
Texas Department of Transportation  
125 East 11th Street  
Austin, Texas 78701-2483  
Phone (512) 416-3120  
Fax (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Start at website - [www.dot.state.tx.us](http://www.dot.state.tx.us)  
Click on "About TxDOT",  
Click on "Organizational Chart",  
Click on Traffic Operations Box,  
Click on "Compliant Work Zone Traffic Control Devices",  
Click on "View PDF".  
This site is printable.


PREQUALIFICATION PROCEDURES ARE OBTAINED FROM:  
CONSTRUCTION DIVISION-MATERIALS AND TESTS SECTION  
TEXAS DEPARTMENT OF TRANSPORTATION (TxDOT)  
125 EAST 11th STREET  
AUSTIN, TX 78701-2483

DEPARTMENTAL MATERIAL SPECIFICATIONS  
FLAT SURFACE REFLECTIVE SHEETING DMS-8300  
DELINEATORS AND OBJECT MARKERS DMS-8600  
MODULER GLARE SCREENS DMS-8610

COLOR	USAGE	SIGN SHEETING
ORANGE	BACKGROUND	TYPE E (FLUORESCENT PRISMATIC)
WHITE	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)
BLACK	LEGEND & BORDERS	VINYL NON-REFLECTIVE SHEETING


REFER TO THE BC SHEETS FOR SHEETING REQUIREMENT ON CHANNELIZING DEVICES.

MULTI-DIRECTIONAL BARRICADE

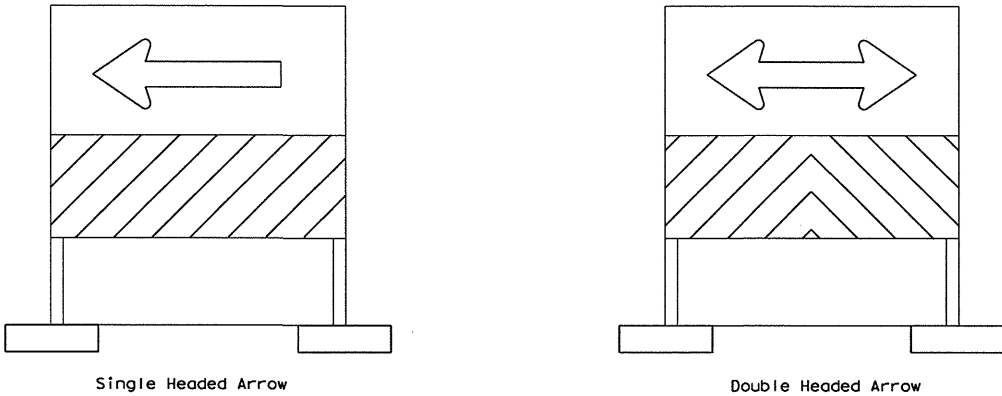

1. Multi-directional barricade shall not be used for lane closures.
2. May be used for sharp changes in alignment, or across roadway from stem of "T" intersection.
3. Typically used for Intermediate Term Stationary, Short Term Stationary or Short Duration work zone operations.
4. See the CWZTCD List for approved designs.

USAGE OF CW1-6, ECW1-6a AND CW1-8 SIGNS

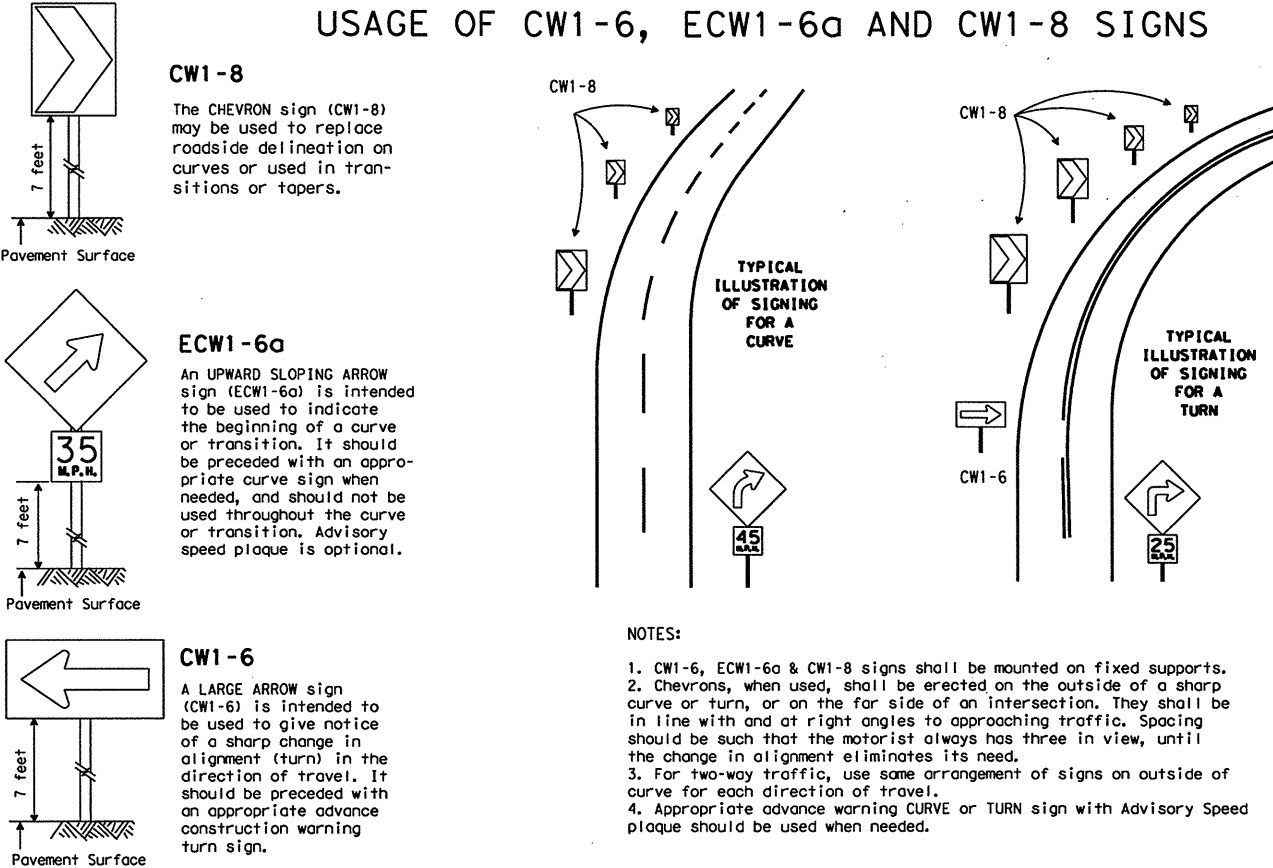

The five categories of work duration and their time at a location shall be:

- A. Long-term stationary is work that occupies a location more than 3 days.
- B. Intermediate-term stationary is work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than 1 hour.
- C. Short-term stationary is daytime work that occupies a location for more than 1 hour, but less than 12 hours.
- D. Short duration is work that occupies a location up to 1 hour.
- E. Mobile is work that moves intermittently or continuously.

STANDARD PLANS  
TEXAS DEPARTMENT OF TRANSPORTATION  
Traffic Operations Division

TRAFFIC CONTROL PLAN  
TYPICAL DETAILS

WZ (TD) -03

REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET
4-98 3-03	DALLAS	6	C 261-3-47, etc.	24
COUNTY	CONTROL	SECTION	JOB	HIGHWAY
DALLAS	0261	03	047, etc.	VAR




DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.




ACC:

LEVELS DISPLAYED

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	

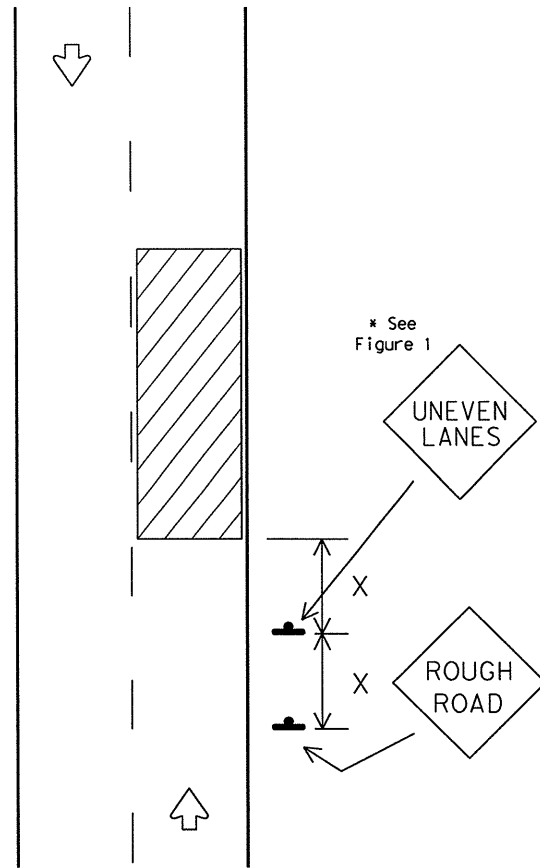

Signing shown for one direction.

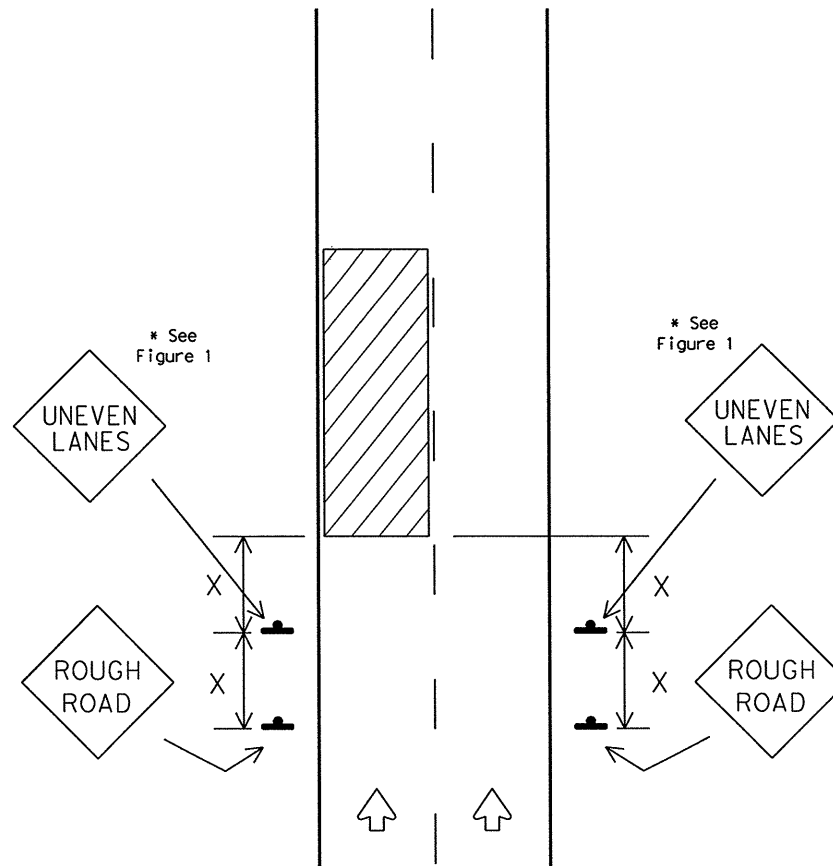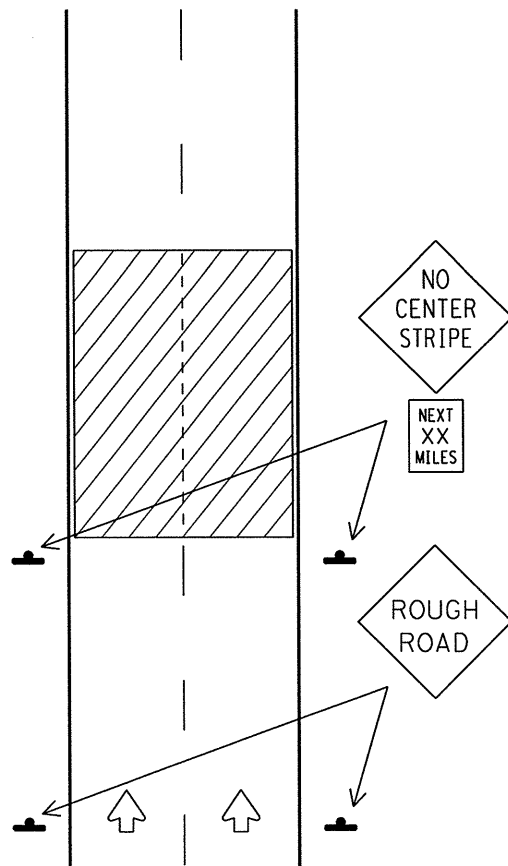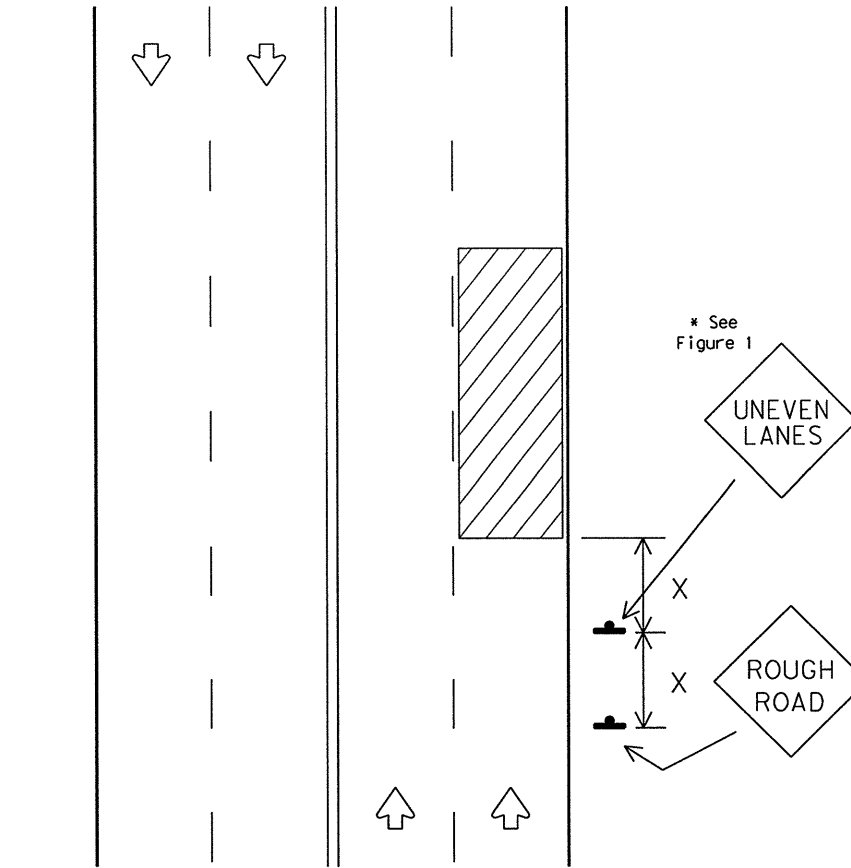

"X" distance - See Note 4 on this page.

#### DEPARTMENTAL MATERIAL SPECIFICATIONS

PLYWOOD SIGN BLANKS	DMS-7100
ALUMINUM SIGN BLANKS	DMS-7110
SIGN HARDWARE	DMS-7120
PREFABRICATED PAVEMENT MARKINGS-PERMANENT	DMS-8240
PREFABRICATED PAVEMENT MARKINGS-REMOVABLE	DMS-8241
FLAT SURFACE REFLECTIVE SHEETING	DMS-8300
VINYL NON-REFLECTIVE DECAL SHEETING	DMS-8320


COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE E (FLUORESCENT PRISMATIC)
BLACK	LEGEND & BORDERS	VINYL NON-REFLECTIVE DECAL SHEETING

#### GENERAL NOTES:

1. If spalling or holes occur, ROUGH ROAD signs should be placed in advance of the condition and may be repeated throughout the project.
2. UNEVEN LANES sign (CW8-11) should be installed in advance of the condition and repeated every mile. Signs installed along the uneven lane condition may be supplemented with the NEXT XX MILES sign (CW21-16) or Advisory Speed sign (CW13-1).
3. NO CENTER STRIPE signs (CW8-12) should be installed if centerlines or lane lines are obscured or obliterated. The signs should remain in place until permanent pavement markings are installed.
4. Signs shall be spaced at the distances recommended as per BC standards.
5. When operations are completed and final surface treatment will not be applied as part of this project, advance signs shall be left in place and become the property of the State. These signs shall be installed on approved permanent sign supports as per TxDOT standards. Additional signs may be required as directed by the Engineer. Minimum mounting height of signs is 7 feet. Signs shall remain in place until final surface is applied. Signs shall be considered subsidiary to the Item "BARRICADES, SIGNS AND TRAFFIC HANDLING."
6. Pavement markings shall be replaced as operations proceed.
7. Short term markings shall not be used to simulate edge lines.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.

#### TRAFFIC CONTROL DURING PLANING, OVERLAY AND LEVELING OPERATIONS ARE SHOWN ELSEWHERE IN THE PLANS.

FIGURE 1

Edge Condition	Edge Height (D)	Warning Devices
	less than or equal to 1"	Signs: ECW8-8
	greater than 1" to: 1 1/4" (maximum-planing) 1 1/2" (typical-overlay)	Signs: CW8-11, ECW8-8
Distance "D" may be a maximum of 1 1/4" for planing operations and 2" for overlay operations if uneven lanes are open to traffic after work operations cease.		

STANDARD PLANS  
TEXAS DEPARTMENT OF TRANSPORTATION  
Traffic Operations Division

#### SIGNING FOR UNEVEN LANES


WZ (UL) -03

© TxDOT April 1992	DN - MT	CU -	DN -	CU - MT	REG NO. 1
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET	
8-95	DALLAS	6	C 261-3-47, etc.	25	
1-97	COUNTY	CONTROL	SECTION	JOB	HIGHWAY
2-98	DALLAS	0261	03	047, etc.	VAR
3-03					


DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ACC:  
LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63

Divided Highway

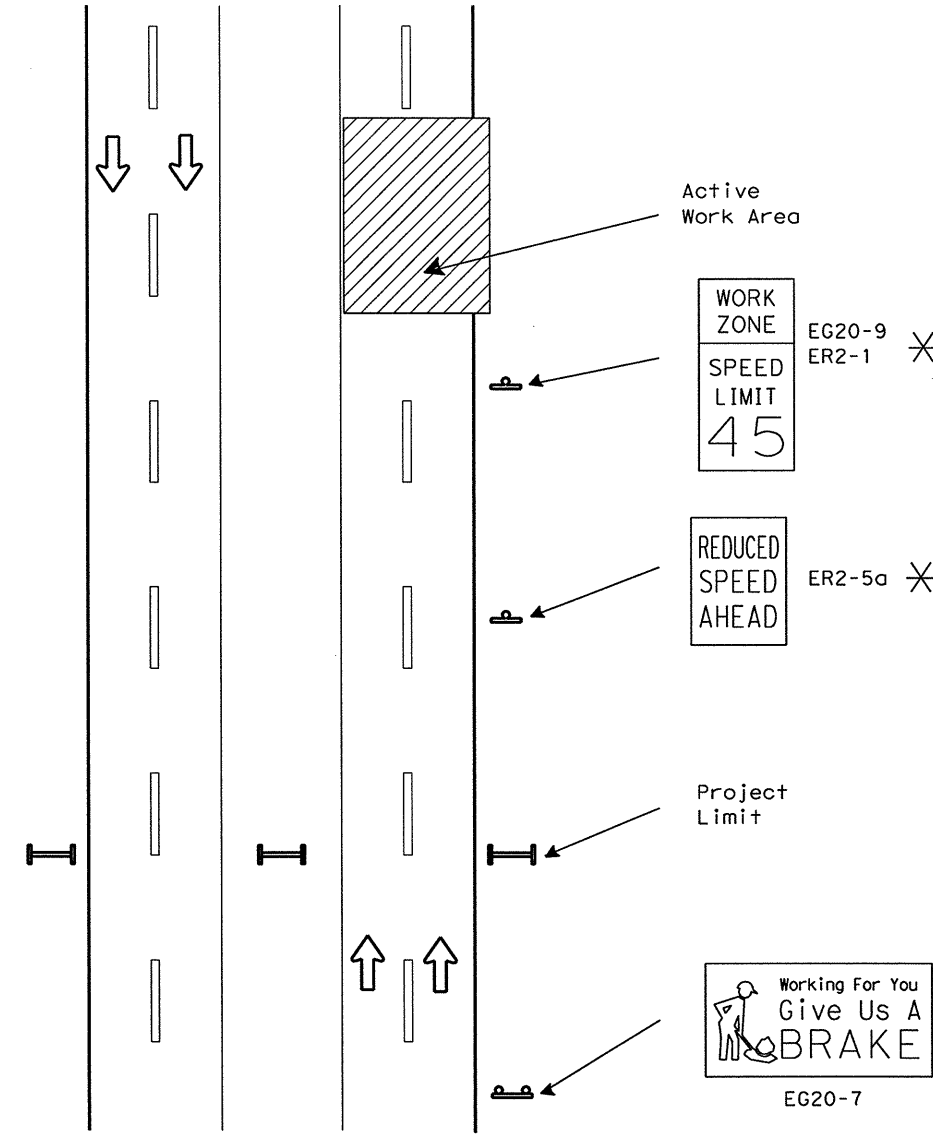

Undivided Highway

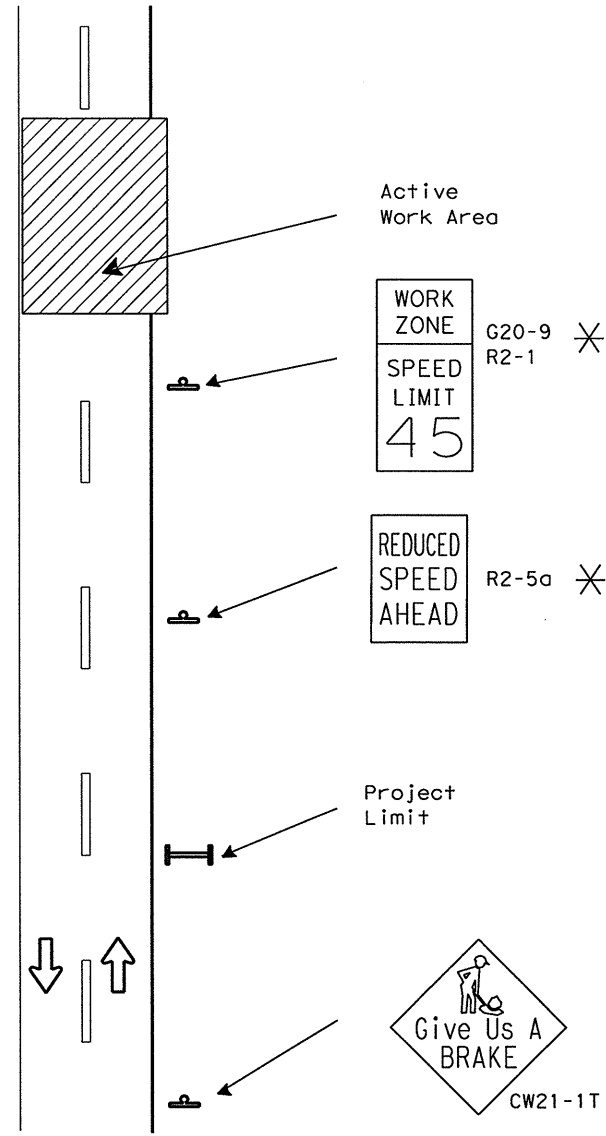

SIGNS ARE SHOWN FOR ONE DIRECTION OF TRAVEL

\* Posted only when reduced speed is directed by the Engineer

SUMMARY OF LARGE SIGNS

BACKGROUND COLOR	SIGN DESIGNATION	SIGN TEXT	SIGN DIMENSIONS	REFLECTIVE SHEETING	PLY TY A (SQ FT)	GALVANIZED STRUCT STEEL		DRILLED SHAFT 24" DIA. (LF)
						Size	(LF)	
Orange	EG20-7	Give Us A BRAKE	16' x 8'	Type E	128	W8x18	16 17	12
Orange	G20-7	Give Us A BRAKE	8' x 4'	Type E	32	S4x7.7	12 13	7 *

\* 12" Non-reinforced Concrete Footing (LF)

SUMMARY OF SMALL SIGNS

BACKGROUND COLOR	SIGN DESIGNATION	SIGN TEXT	SIGN DIMENSIONS	REFLECTIVE SHEETING	PLY TY A (SQ FT)
Orange	EG20-9	WORK ZONE	36" x 24"	Type E	6
Orange	G20-9	WORK ZONE	24" x 18"	Type E	3
White	ER2-1	SPEED LIMIT	36" x 48"	Type C	12
White	ER2-5a	REDUCED SPEED AHEAD	36" x 48"	Type C	12
Orange	CW21-1T	GIVE US A BRAKE	48" x 48"	Type E	16

DEPARTMENTAL MATERIAL SPECIFICATIONS		
PLYWOOD SIGN BLANKS	DMS-7100	
ALUMINUM SIGN BLANKS	DMS-7110	
FLAT SURFACE REFLECTIVE SHEETING	DMS-8300	
VINYL NON-REFLECTIVE SHEETING	DMS-8320	
COLOR	USAGE	SHEETING MATERIAL
WHITE	BACKGROUND	TYPE C (HIGH SPECIFIC INTENSITY)
ORANGE	BACKGROUND	TYPE E (FLUORESCENT PRISMATIC)
BLACK	LEGEND & BORDERS	VINYL NON-REFLECTIVE SHEETING

GENERAL NOTES:

- See BC and SMD sheets for additional sign support details.
- Sign locations shall be approved by the Engineer.
- For projects more than two miles in length, Give Us a BRAKE and WORK ZONE SPEED LIMIT signs should be repeated halfway through the project.
- The WORK ZONE (G20-9) sign is to be installed in combination with a SPEED LIMIT (R2-1) sign.
- Speed limits shall be regulatory and approved by the Transportation Commission.
- EG20-9, G20-9, ER2-1, R2-1, ER2-5a, R2-5a and CW21-1T signs and supports shall be considered subsidiary to Item 502, "Barricades, Signs and Traffic Handling."
- G20-7 and EG20-7 signs shall be paid for under the following bid items:
  - Item 634 Plywood Signs Type A
  - Item 647 Large Roadside Sign Supports
  - Item 656 Foundations for Signs, Traffic Signals and Roadway Ill. Assem.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.

STANDARD PLANS  
TEXAS DEPARTMENT OF TRANSPORTATION  
Traffic Operations Division

WORK ZONE  
"GIVE US A BRAKE"  
SIGNS

WZ (BRK-2)-03

© TxDOT August 1995	DN: - LR	CK: -	DN: - DN	CK: -	NEG NO.:
REVISIONS	STATE DISTRICT	FEDERAL REGION	STATE PROJECT NO	SHEET	
6-96	DALLAS	6	C 261-3-47, etc.	28	
8-96					
5-98					
3-03	DALLAS	0261	03	047, etc.	VAR

SITE DESCRIPTION

PROJECT LIMITS: US 67:from IH 35E to IH 20  
IH 35E:from IH 20 to Clarendon Dr.  
IH 20:from Tarrant County Line to 0.5 mile West of IH 35E

LOCATION MAPS: Project Location Map - Sheet 1 of the Project Plans.

PROJECT DESCRIPTION:  
THE REHABILITATION OF EXISTING ROADWAY PAVEMENTS.  
CONSISTING OF: SURFACE TEXTURING TO IMPROVE SKID SCORES.

MAJOR SOIL DISTURBING ACTIVITIES:  
No disturbing activities shall be required.

EXISTING CONDITION OF SOIL & VEGETATIVE  
COVER AND % OF EXISTING VEGETATIVE COVER:  
The working area is only the Existing Roadway Pavement.  
No work will be done outside the Existing Traffic Lanes.

TOTAL PROJECT AREA: 255.86 Acres

TOTAL AREA TO BE DISTURBED: 0.0 Acres ( 0 %)

WEIGHTED RUNOFF COEFFICIENT  
BEFORE CONSTRUCTION: 0.90  
AFTER CONSTRUCTION: 0.90

NAME OF RECEIVING WATERS:  
No water will be required for the completion of this project.

ENDANGERED SPECIES, DESIGNATED CRITICAL HABITAT AND HISTORIC PROPERTY:  
A. NO Endangered Species, Designated Critical Habitat or Historic Property  
has been found on this project site.

EROSION AND SEDIMENT CONTROLS

SOIL STABILIZATION PRACTICES

TEMPORARY: (Select T = Temporary as applicable)

- ☐ TEMPORARY SEEDING

☐ MULCHING (Hay or Straw)

☐ BUFFER ZONES
- ☐ PRESERVATION OF NATURAL RESOURCES

☐ FLEXIBLE CHANNEL LINER

☐ OTHER

PERMANENT: (Select P = Permanent as applicable)

- ☐ PLANTING

☐ SEEDING

☐ SODDING
- ☐ SOIL RETENTION BLANKET

☐ CHANNEL LINER

☐ OTHER

OTHER:

Disturbed areas on which construction activities have ceased, temporarily or permanently, shall be stabilized within 14 calendar days unless they are scheduled to and do resume within 21 calendar days.

STRUCTURAL PRACTICES: (Select T = Temporary or P = Permanent as applicable)

- ☒ SILT FENCES

☒ HAY BALES

☐ ROCK FILTER DAMS

☐ DIVERSION, INTERCEPTOR, OR PERIMETER DIKES

☐ DIVERSION, INTERCEPTOR, OR PERIMETER SWALES

☐ DIVERSION DIKE AND SWALE COMBINATIONS

☐ PIPE SLOPE DRAINS

☐ PAVED FLUMES

☐ ROCK BEDDING AT CONSTRUCTION EXIT

☐ TIMBER MATTING AT CONSTRUCTION EXIT

☐ CHANNEL LINERS

☐ SEDIMENT TRAPS

☐ SEDIMENT BASINS

☐ STORM INLET SEDIMENT TRAP

☐ STONE OUTLET STRUCTURES

☐ CURBS AND GUTTERS

☐ STORM SEWERS

☐ VELOCITY CONTROL DEVICES

OTHER:

OTHER PRACTICES & REQUIREMENTS

MAINTENANCE:

All erosion and sediment controls shall be maintained in good working order. If a repair is necessary, it shall be performed at the earliest date possible but no later than 7 calendar days after the surrounding exposed ground has dried sufficiently to prevent further damage from heavy equipment. The areas adjacent to creeks and drainageways shall have priority followed by devices protecting storm sewer inlets.

WASTE MATERIALS:

All waste materials shall be collected in a metal dumpster having a secure cover. The dumpster shall meet all state and local city solid waste management regulations. All trash and debris from construction shall be deposited in the dumpster. The dumpster shall be emptied, as necessary or as required by local regulation, and hauled to a local approved land fill site. The burying of construction waste on the project site shall not be permitted.

HAZARDOUS WASTE (INCLUDING SPILL REPORTING):

As a minimum, any products in the following categories are considered to be hazardous: paints, acids, solvents, asphalt products, chemical additives for soil stabilization and concrete curing compounds or additives. In the event of a spill which may be hazardous, the spill coordinator shall be contacted immediately.

SANITARY WASTE:

All sanitary waste shall be collected from the portable units, as necessary or as required by local regulation, by a licensed sanitary waste management contractor.

OFFSITE VEHICLE TRACKING:


The Contractor shall be required, on a regular basis or as may be directed by the Engineer, to dampen haul roads for dust control, stabilize construction entrances and to remove excess dirt from the roadway.

REMARKS:

1. Disposal areas, stockpiles and haul roads shall be constructed in a manner that will minimize and control the amount of sediment that may enter receiving waters. Disposal areas shall not be located in any wetland, waterbody or streambed.
2. Construction staging areas and vehicle maintenance areas shall be constructed by the Contractor in a manner to minimize the runoff of pollutants.

STORM WATER MANAGEMENT:

1. Storm water drainage will be provided by the ditches, inlets and storm water systems which will carry drainage within the R.O.W. to the lows within the roadway and project site which drains to natural facilities.
2. Other permanent erosion controls include hydraulic design to limit structure outlet velocities and grading design generally consisting of 4:1 or flatter slopes with permanent vegetative cover.



Jahor Roy, P.E. 4/9/03  
Date




STORM WATER POLLUTION  
PREVENTION PLAN (SW3P)

SHEET 1 OF 1

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
JLR	6	C 261-3-47, etc.		VAR
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
JLR	TEXAS	DALLAS	DALLAS	29
CHECK	CONTROL	SECTION	JOB	
TBP	2374	03	047, etc.	

DISCLAIMER:  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

LEVELS DISPLAYED	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

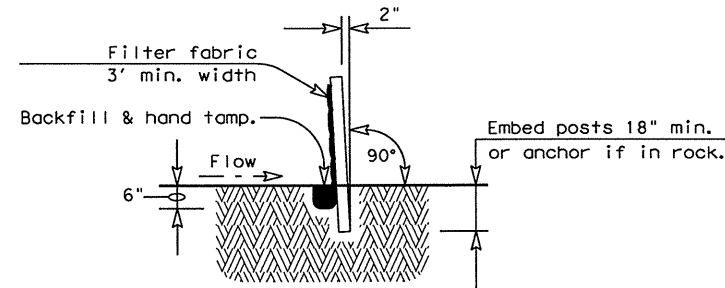

SECTION A-A

**SEDIMENT CONTROL FENCE USAGE GUIDELINES**

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.


Sediment control fence should be sized to filter a max. flow through rate of 100 GPM/FT<sup>2</sup>. Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.

**PLAN SHEET LEGEND**

Sediment Control Fence — SCF —


**GENERAL NOTES**

1. The guidelines shown hereon are suggestions only and may be modified by the Engineer.

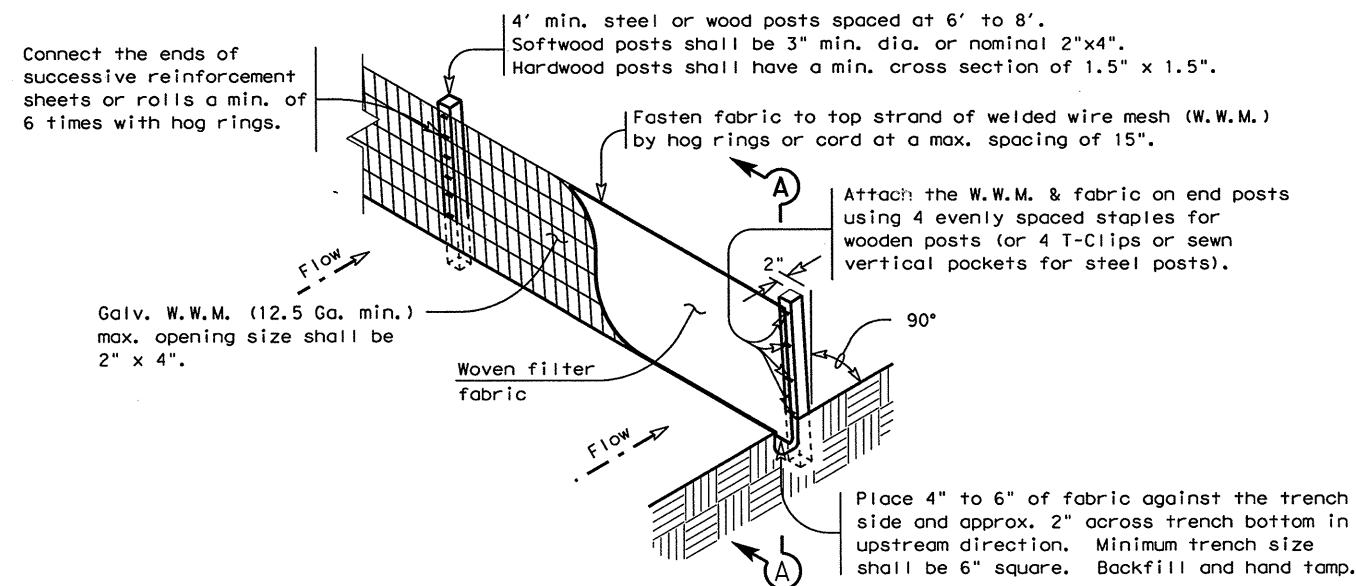


TEMPORARY SEDIMENT CONTROL FENCE

SCF

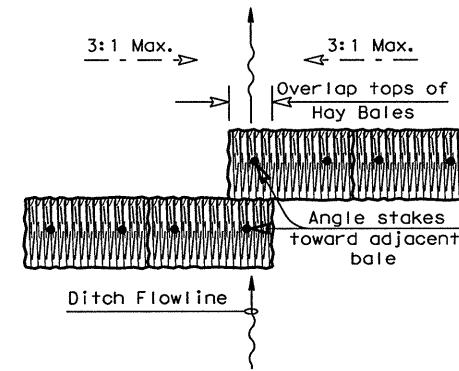

PLAN VIEW

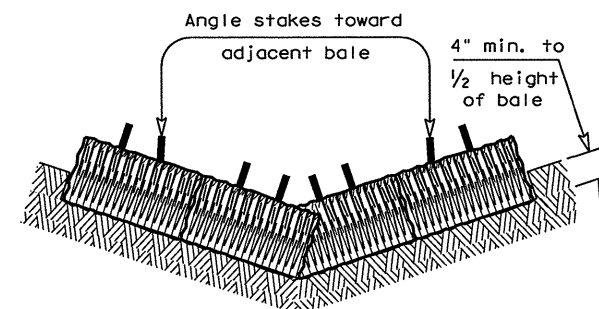

PROFILE VIEW

**PLANS SHEET LEGEND**

Baled Hay — BH —

**BALED HAY USAGE GUIDELINES**


A Baled Hay installation may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A two year storm frequency may be used to calculate the flow rate to be filtered. The installation should be sized to filter a maximum flow thru rate of 5 GPM/FT<sup>2</sup> of cross sectional area. Baled hay may be used at the following locations:

1. Where the runoff approaching the baled hay flows over disturbed soil for less than 100'. If the slope of the disturbed soil exceeds 10%, the length of slope upstream the baled hay should be less than 50'.
2. Where the installation will be required for less than 3 months.
3. Where the contributing drainage area is less than 1/2 acre.


For Baled Hay installations in small ditches, the additional following considerations apply:

1. The ditch sideslopes should be graded as flat as possible to maximize the drainage flowrate thru the hay.
2. The ditch should be graded large enough to contain the overtopping drainage when sediment has filled to the top of the baled hay.

Bales should be replaced usually every 2 months or more often during wet weather when loss of structural integrity is accelerated.

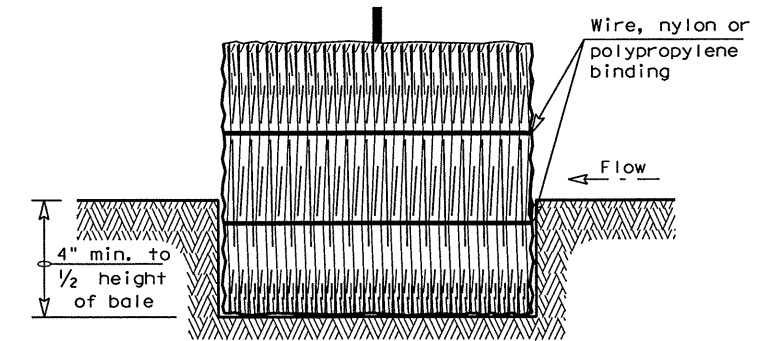

SECTION B-B

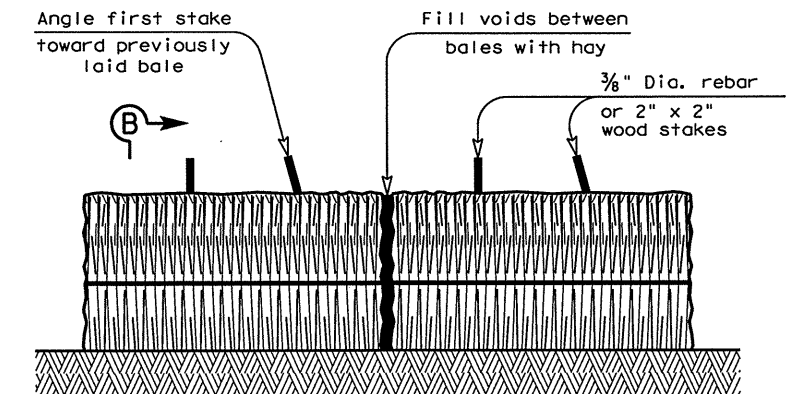

BALED HAY FOR EROSION CONTROL

BH

**GENERAL NOTES**

1. Hay bales shall be a minimum of 30" in length and weigh a minimum of 50 Lbs.
2. Hay bales shall be bound by either wire or nylon or polypropylene string. The bales shall be composed entirely of vegetative matter.
3. Hay bales shall be embedded in the soil a minimum of 4" and where possible 1/2 the height of the bale.
4. Hay bales shall be placed in a row with ends tightly abutting the adjacent bales. The bales shall be placed with bindings parallel to the ground.
5. Hay bales shall be securely anchored in place with 3/8" Dia. rebar or 2" x 2" wood stakes, driven through the bales. The first stake shall be angled towards the previously laid bale to force the bales together.
6. The guidelines shown hereon are suggestions only and may be modified by the Engineer.

**Texas Department of Transportation**  
Design Division (Roadway)

**TEMPORARY EROSION,  
SEDIMENT AND WATER  
POLLUTION CONTROL MEASURES**

**FENCED & BALED HAY**

**EC(1)-93**

FILE: EC193.DGN	DW: HEJ	CK: HEJ	DW: BGD	CK:
© TxDOT JUNE 1993	DISTRICT	STATE PROJECT NO	SHEET	
REVISIONS	DALLAS	C 261-3-47, etc.	30	
	COUNTY	CONTROL	SECT	JOB
	DALLAS	0261	03	047, etc. VARIOUS